



# S8-Series Specifications



**8.00L x 8.00W x 2.45H (mm)**

PDI S8-Series is a hermetically sealed quartz crystal in a surface mount package. This crystal, designed to meet your most demanding specification, is available in standard or custom frequencies and/or with customized parameters. PDI provides quick-turn sampling for your proto-typing needs, mass production capability, and competitive pricing.

ex) **S8-25000X-F-B-C-B-18-X-X\***

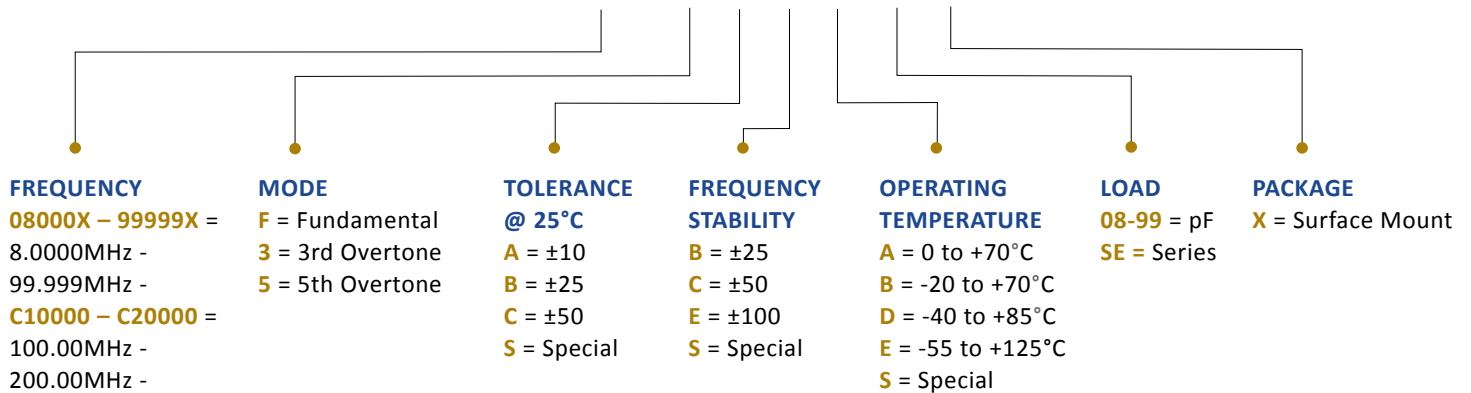

\*(X) for standard or assigned for customization.

Parameter	Mode			Units
	Fundamental	3rd Overtone	5th Overtone	
Frequency Range*1	8.0000 to 40.0000	40.0000 to 120.0000	60.0000 to 200.0000	MHz
Frequency Tolerance	@ +25°C Per Option			ppm
Temperature Range*1	Operating Per Option			°C
	Storage - 55 to +125			°C
Frequency Stability*1	Over Operating Temperature Per Option			ppm
Equivalent Series Resistance (Maximum)	8.000000 to 10.000000 MHz	80		Ω
	10.000000 to 13.000000 MHz	60		
	13.000000 to 20.000000 MHz	40		
	20.000000 to 30.000000 MHz	30		
	25.000000 to 40.000000 MHz	60		
	40.000000 to 60.000000 MHz		50	
	60.000000 to 80.000000 MHz		60	
	80.000000 to 120.000000 MHz		70	
	60.000000 to 100.000000 MHz		80	
	100.000000 to 150.000000 MHz		90	
125.000000 to 200.000000 MHz		100		
Drive Level (Typical)	100			uW
Shunt Capacitance (Maximum)	7.0			pF
Load Capacitance (Typical)	Per Option			pF
Aging (Maximum)	Per Year ±3.0			ppm
Seal Method	Resistance Weld			
Insulation Resistance	500MΩ Minimum @100Vdc ±15V			


\*1 - Not all Frequency/Stability/Temperature combinations are available.

# S8-Series 8.00 x 8.00 x 2.45 (mm)

## PACKAGE DIMENSIONS

Decimal XXX = ± .008, XX = ± .02 Metric [XXX = ± .20], [XX = ± .50]

PIN	CONNECTION
1	Crystal
2	No Connect
3	Crystal
4	No Connect

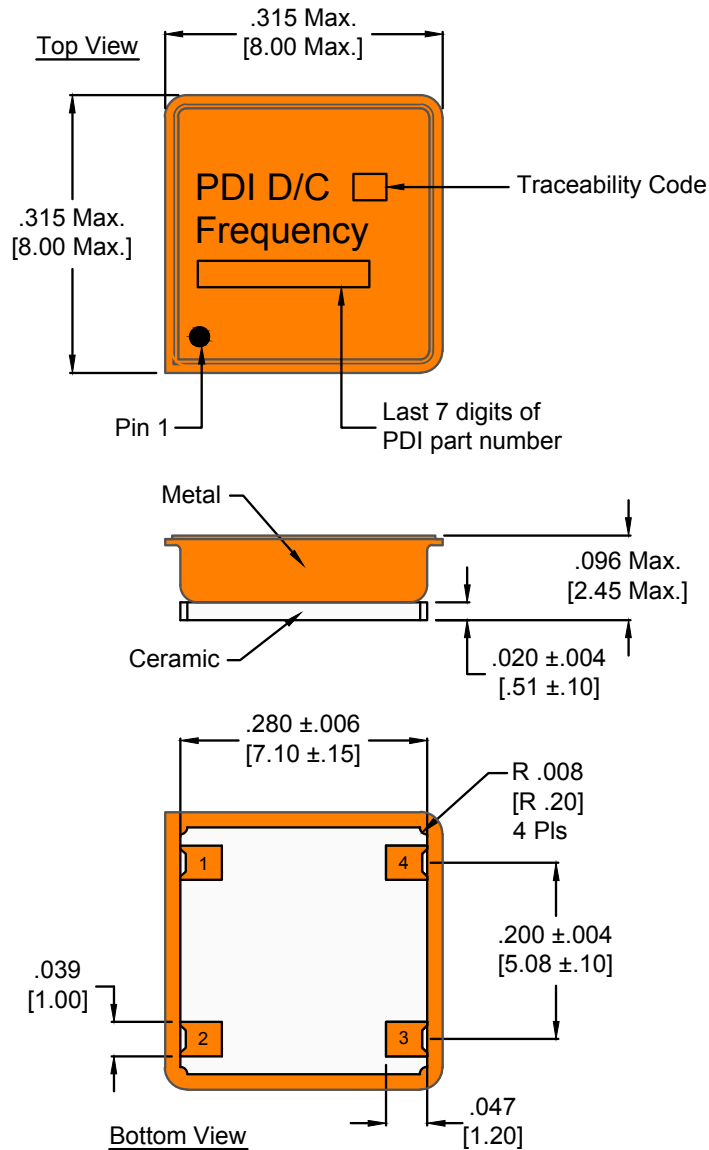

**NOTES:**

Terminals are Au.  
 Other options are available, please consult factory.  
 All product is supplied RoHS and REACH compliant.  
 Product can be supplied on Tape and Reel, on reels of 1,000 units.  
 Specifications subject to change without notice, last updated 4/1/13.