

SMD Crystal 32.768kHz




- Excellent aging characteristics
- Ultrathin thickness 0.6mm
- Reflow is possible
- RoHS compliant and lead free

Part Numbering Example CX212 Z - A2 C5 - 32.768kHz D12.5

CX212	Z	A2	C5	32.768kHz	D12.5
SERIES	ADDED FEATURES	OPERATING TEMP	TOLERANCE	FREQUENCY	LOAD CAP
CX212	Blank = Bulk Pack Z = Tape and Reel	A2 = -40°C + 85°C	C5 = ± 20 ppm C2 = ± 50 ppm		D9 = 9.0 pF D12.5 = 12.5 pF

** Note: the above ABC combinations cover basic specification options. We tailor our crystals specifications to meet customer requirements. Please contact our sales department if you do not see exactly what you need.*

Specifications:		CX212
Frequency		32.768kHz
Frequency Tolerance at 25°C		± 20ppm, ± 50ppm
Operating Temperature		-40°C + 85°C
Equivalent Series Resistance		90k ohms max.
Temperature Characteristics		25°C ± 5°C
- Turnover Temperature		
- Parabolic Curvature Constant		-0.045 x 10 ⁻⁶ / °C ² max.
Drive Level		0.1 uW
Shunt Capacitance		2.0pF max.
Load Capacitance		12.5pF, 9.0pF
Insulation Resistance		500M ohms/ DC 100V
Aging		± 3ppm/ year
Package		3K Tape and Reel

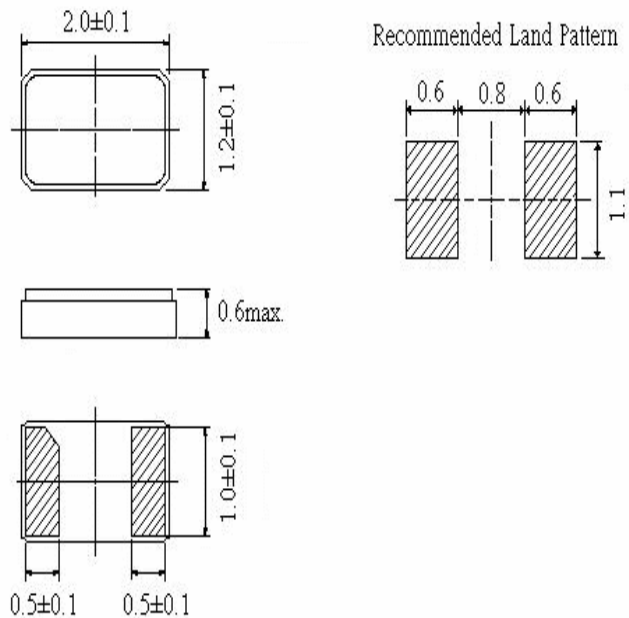

145 Route 46 West
Wayne, NJ 07470

Tel: (973)785-1333
Fax: (973)785-0053
E-Mail: sales@cardinalxal.com
Web: www.cardinalxal.com