


CCSS-945 Model

9×14 mm SMD, 5.0V, SineWave



Frequency Range:
Frequency Stability Options(ppm)
Temperature Range:
(Option M)
(Option X)

10 MHz to 125 MHz
±20, ±25, ±50
(standard) 0°C to 70°C
-20°C to +70°C
-40°C to +85°C
-45°C to +90°C

Storage:

Input Voltage:
Input Current:

5.0V ± 0.5V
30mA Max

Output:

Output Power:
Start-up time:
Load:

True SineWave
+5 dBm Min, +7 dBm Typical
2ms Typical, 5ms Max
50 ohms

2nd Harmonic:
Sub-harmonics:



-25 dBc Max
None

Phase Noise Typical:
(@100MHz)



10Hz	-85 dBc/Hz
100Hz	-120 dBc/Hz
1kHz	-145 dBc/Hz
10kHz	-162 dBc/Hz
100kHz	-170 dBc/Hz
1MHz	-170 dBc/Hz

Aging:

<3ppm 1st year, <1ppm every year thereafter

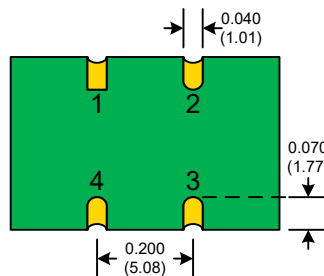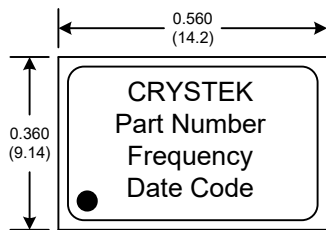

SUGGESTED PAD LAYOUT

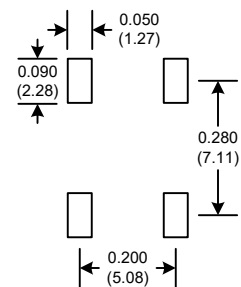

Pad	Connection
1	NC
2	GND
3	OUT
4	Vdd

Rev: F
Date: 18-Jan-2017
Page 1 of 3

Specifications subject to change without notice.

CCSS-945 Model
9×14 mm SMD, 5.0V, SineWave

Crystek Part Number Guide

CCSS - 945 X - 25 - 125.000

#1 #2 #3 #4 #5

#1 Crystek 9×14 SMD SineWave Clock
#2 Model 945 = Ultra Low Noise 5.0V
#3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C
#4 Stability: (see Table 1)
#5 Frequency in MHz: 3 or 6 decimal places

Example:

CCSS-945X-25-100.000
5.0V, -40/85°C, ±25ppm, 100.000 MHz

Stability Indicator

Blank ± 100ppm
50 ± 50ppm
25 ± 25ppm
20* ± 20ppm

*not available in -40/85


Table 1

Standard Frequencies MHz

10.000
50.000
80.000
100.000
122.880
125.000

RECOMMENDED REFLOW SOLDERING PROFILE
900034 (See App Note listed on website)

<http://www.crystek.com/specification/reflow/900034.pdf>

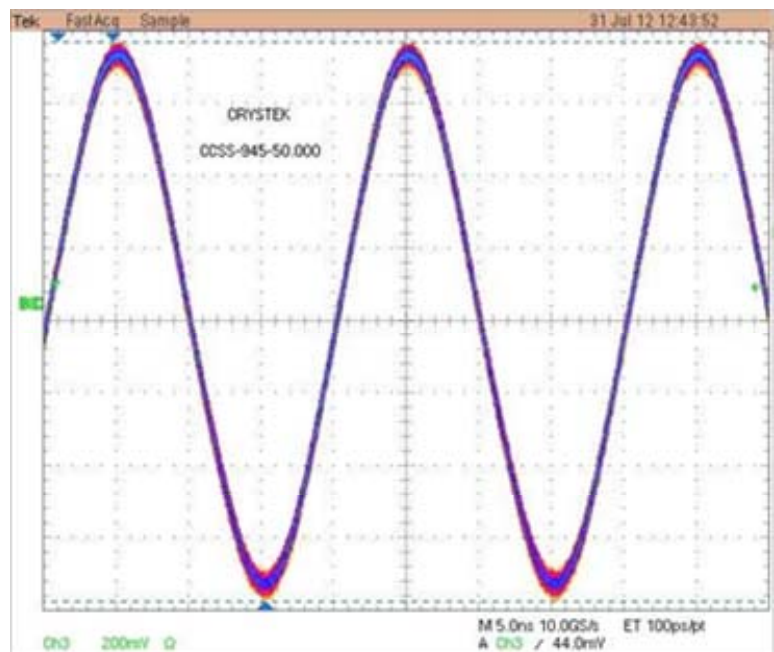

Mechanical:

Shock: MIL-STD-883, Method 2002, Condition B
Solderability: MIL-STD-883, Method 2003
Vibration: MIL-STD-883, Method 2007, Condition A
Solvent Resistance: MIL-STD-202, Method 215
Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J

Environmental:

Thermal Shock: MIL-STD-883, Method 1011, Condition A
Moisture Resistance: MIL-STD-883, Method 1004


Packaging:

Tape/Reel: 100ea, 250ea, 500ea 24mm Tape


Rev: F
Date: 18-Jan-2017
Page 2 of 3




CCSS-945 Model
9x14 mm SMD, 5.0V, SineWave

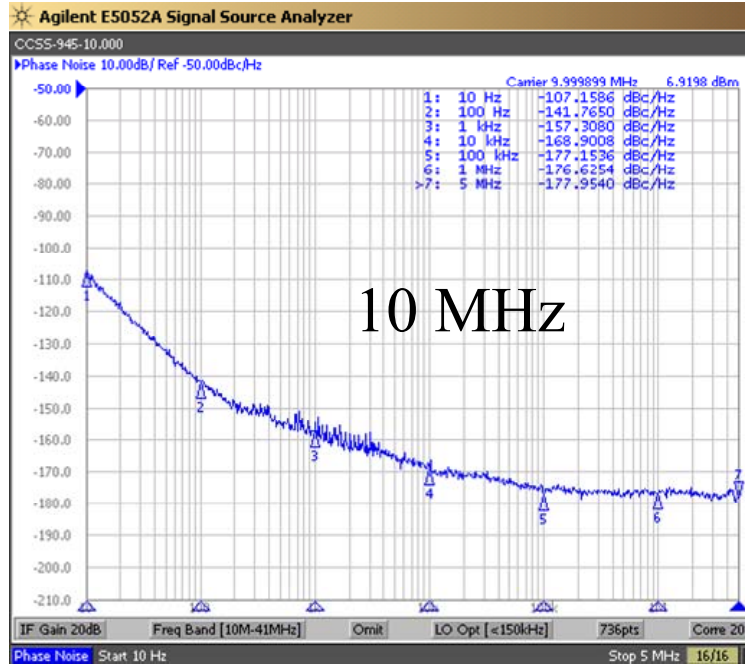

10 MHz

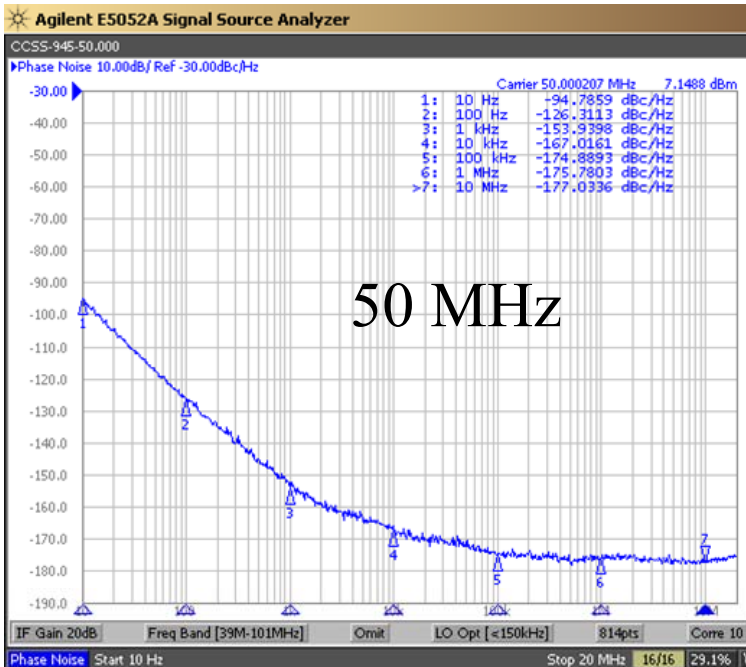

50 MHz

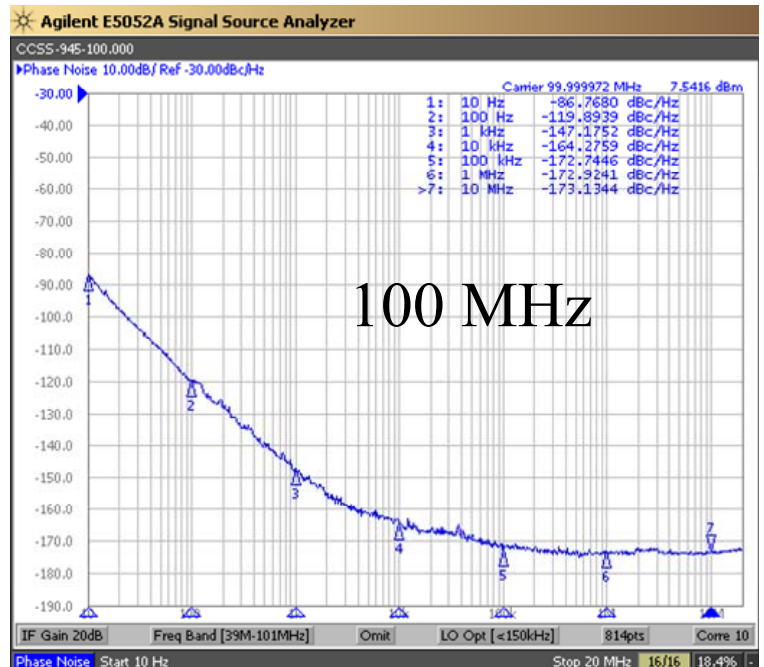

100 MHz

Rev: F
Date: 18-Jan-2017
Page 3 of 3