


### FEATURES

- EME83x is a 32.768kHz CMOS output TCXO with a maximum frequency stability of  $\pm 5\text{ppm}$  ( $\pm 2.62$  minutes / year) over the operating temperature range  $-40^\circ$  to  $+85^\circ\text{C}$ . This time-keeping accuracy is outstanding in the industry.
- A proprietary temperature compensation technique is applied to the built-in X-Cut 32.768kHz tuning fork crystal and temperature sensor.
- A 400nA current compensation (average  $f_{\text{OUT}} \leq 128\text{Hz}$ , 4 min TMP.) makes it ideal for battery operated devices.
- The TCXO is packaged in a 7 x 5 x 1.8mm package, ideal for miniaturized applications.
- Designed for long-term frequency reference applications.



### APPLICATIONS


- Frequency Reference for real time clocks (RTC).
- Portable instrumentation.
- Timing synchronization for networks, servers, hubs, routers and switches.
- Timing Reference input for various energy metering ICs.
- Smart metering, data loggers.
- GPS receivers, telematics.



### RELATED EUROQUARTZ PRODUCTS

- If temperature compensation is not required please consider using Euroquartz HA series 32.768kHz (AT-CUT crystal,  $\mu\text{A}$  current consumption,  $\pm 25/\pm 50/\pm 200\text{ppm}$  over commercial or industrial temperature ranges).
- If tighter than  $\pm 5\text{ppm}$  frequency stability is required, i.e.  $\pm 1 \sim \pm 2.5\text{ppm}$  over  $-40^\circ$  to  $+85^\circ\text{C}$ , please consider use of EM572T 32.768kHz TCXO or VEM572T 32.768kHz VCTCO series. (All use AT-Cut crystals, mA current consumption.)

### FREQUENCY-TEMPERATURE CHARACTERISTICS

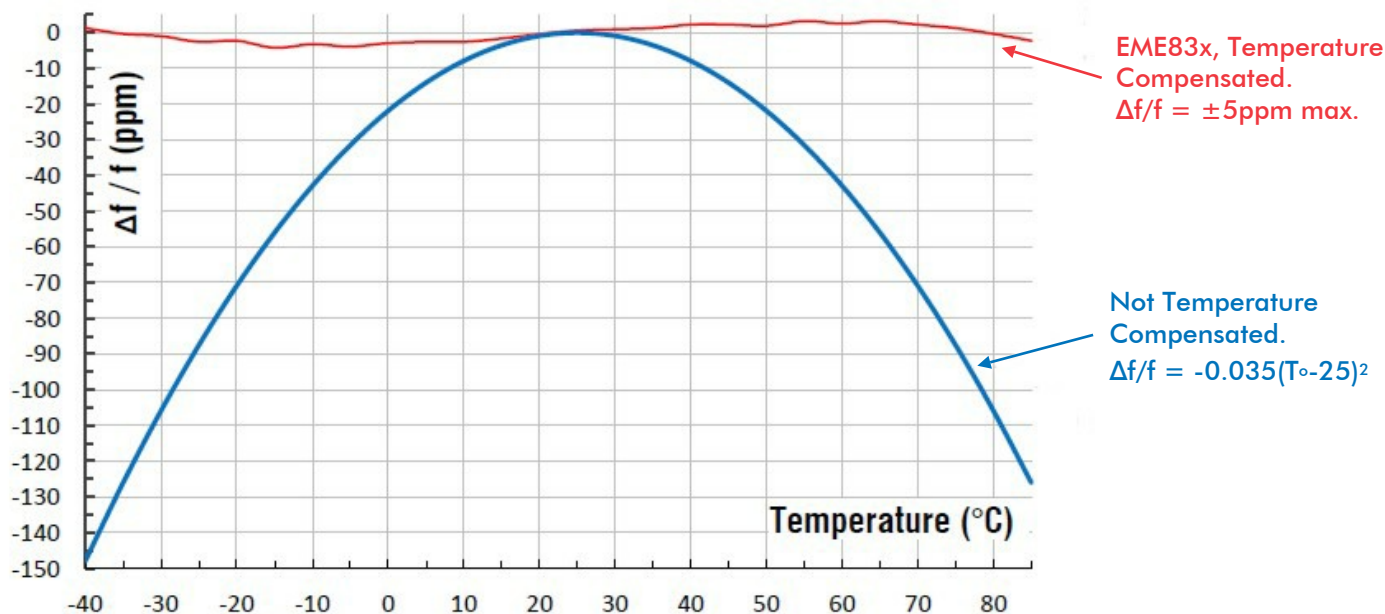

**GENERAL SPECIFICATIONS** (at 25°C and specified input voltage)

Product Series		EME831, EME832, EME833 and EME834					
		EME831	EME832	EME833	EME834		
<b>Temperature Measurement Period (TMP), Also known as Compensation Interval.</b>		Every 1 minute	Every 2 minutes	Every 30 seconds	Every 4 minutes (standard series)		
	Overall power consumption increases for more frequent measurement periods. For lowest power consumption the 4 minute measurement period (model EME834) is recommended. For peak current during temperature measurement see I <sub>DD</sub> data below						
<b>Frequency</b>		Standard frequency: 32.768kHz					
		Also available in 4.096kHz, 1.024kHz, 128Hz, 32Hz, 1Hz, 1/10Hz, 1/60Hz.					
<b>Supply Voltage (V<sub>DD</sub>) Range</b>		1.7V minimum, 5.5V maximum					
<b>Supply Voltages (V<sub>DD</sub>)</b>	<b>(V<sub>DD</sub>)</b>	1.8V ±5%	2.5V ±5%	3.0V ±5%	3.3V ±5%	5.0V ±5%	
	<b>Tolerance</b>	1.71V ~ 1.89V	2.37V ~ 2.62V	2.85V ~ 3.15V	2.97V ~ 3.63V	4.75V ~ 5.25V	
	<b>Voltage Code</b>	<b>18</b>	<b>25</b>	<b>3</b>	<b>33</b>	<b>5</b>	
<b>Supply Current (I<sub>DD1</sub>) Typical</b> Conditions: No load, 25°C, f <sub>OUT</sub> = 32.768kHz		0.79µA	1.05µA	1.25µA	1.37µA	2.05µA	
<b>Peak Current during Temperature Measurement (I<sub>DD2</sub>) Typical.</b> Conditions: No load, 25°C, f <sub>OUT</sub> = 32.768kHz		1.95µA	2.0µA	2.03µA	2.05µA	2.14µA	
<b>Supply Current (I<sub>DD3</sub>) when Pad 1 is disabled. Typical</b> Conditions: No load, 25°C, f <sub>OUT</sub> = 32.768kHz		0.39µA	0.47µA	0.53µA	0.56µA	0.80µA	
<b>Supply Current (I<sub>DD4</sub>) Typical</b> Conditions: No load, 25°C, f <sub>OUT</sub> = 32Hz		327nA	408nA	460nA	470nA	700nA	
<b>Initial Calibration Tolerance</b>		±1.5ppm maximum over -40° to +85°C w.r.t. f <sub>0</sub> at +25°C					
<b>Frequency Stability (ppm) over temperature</b>		±5ppm maximum over -40° to +85°C w.r.t. f <sub>0</sub> at +25°C					
		<b>Timing Error over Time</b>	Per day	±0.432 s/day max.			
			Per month	±12.960 s/month max.			
			Per year	±2.628 minutes/year max.			
<b>Frequency Stability</b>							
<b>vs. Ageing</b>		±3ppm/year maximum first year at 25°C					
<b>vs. Load Change</b>		±0.2ppm max. for a 10% load condition change					
<b>vs. Reflow</b>		±1ppm max. 1 reflow and measured 24 hours afterwards					
<b>vs. All range of V<sub>DD</sub> (Δf/V)</b>		±1ppm/Volt max. V <sub>DD</sub> = 1.7V to 5.5V.					
<b>Supply Voltage Variation (ΔV<sub>DD</sub>)</b>		0.25 V max. Supply voltage stability at specified V <sub>DD</sub> . Condition ΔV / Δt = 1 V/μs					
<b>Output Wave Form</b>		CMOS Square Wave					
<b>Output Load</b>		15pF					


<b>Output Voltage Levels</b>	<b>V<sub>OH</sub></b>	V <sub>DD</sub> - 0.4V min. I <sub>OH</sub> = -0.1mA, all V <sub>DD</sub> range
	<b>V<sub>OL</sub></b>	0.4V max., I <sub>OL</sub> = 0.1mA, all V <sub>DD</sub> range
<b>Rise Time (t<sub>r</sub>) and Fall Time (t<sub>f</sub>)</b>	100 ns max., at 20% to 80% of waveform. 15pF load.	
<b>Start-up Time (T<sub>s</sub>)</b>	1ms max., at +25°C; 3ms max. over -40° to +85°C	
<b>Duty Cycle (Symmetry)</b>	32768Hz, 4096Hz & 1024Hz: 50%±10% max.	Measured at 50% of V <sub>DD</sub> over -40° to +85°C
	128Hz, 32Hz, 1Hz, 1/10Hz, 1/60Hz: 50% ±5% max.	
<b>Pin 1 OE Thresholds</b>	V <sub>Ih</sub> = 0.8 *V <sub>DD</sub>	
	V <sub>Il</sub> = 0.2*V <sub>DD</sub>	

**ENVIRONMENTAL PERFORMANCE and SPECIFICATIONS**

<b>Green Compliance</b>	RoHS Compliant, Pb (lead) free in accordance with EU Directive 2002/95/EC
<b>Moisture Sensitivity Level</b>	MSL = 1. According to IPC/JEDEC J-STD-020D.1
<b>Humidity</b>	85% RH, 85°C for 48 hours
<b>Hermeticity</b>	Leak rate 2 x 10 <sup>-8</sup> ATM-cm <sup>3</sup> /s maximum.
<b>Solderability</b>	MIL-STD-202F method 208E
<b>Vibration</b>	MIL-STD-202F method 204, 35G, 50 to 2000Hz
<b>Shock</b>	MIL-STD-202F method 213B, test condition E, 1000g ½ sinewave
<b>Electrostatic Sensitivity</b>	2kV minimum, Human Body Model (HBM) according to IEC 61000-4-2
<b>Contact Pad Surface Finish</b>	0.3 ~ 1.2µm gold over 1.27 ~ 8.89µm nickel
<b>Solder Reflow</b>	20s max at peak temperature of 260°C. Two reflows maximum
<b>Weight of the device</b>	0.196 grams typical


**ABSOLUTE MAXIMUM RATINGS**

<b>Supply Voltage (V<sub>DD</sub>)</b>	-0.5V minimum, 6.5V maximum V <sub>SS</sub> = 0V
<b>Ambient Temperature Range</b>	-40° to +85°C
<b>Storage Temperature Range</b>	-40° to +85°C for temperature compensated units

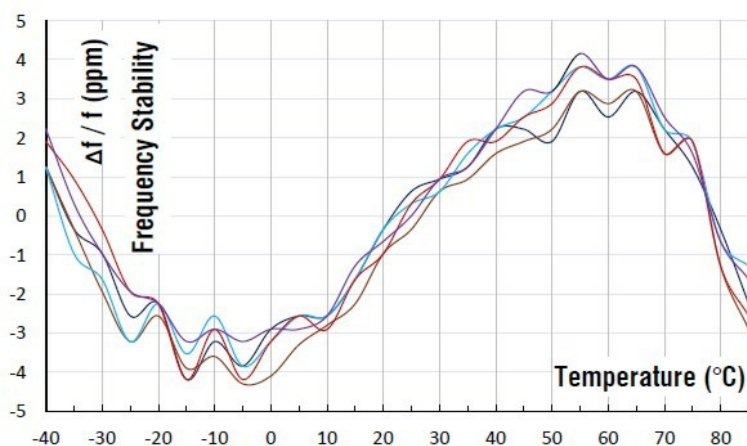
**TYPICAL FREQUENCY STABILITY OVER TEMPERATURE**


**PEAK CURRENT DURING MEASUREMENT PERIOD**


Example shown: 18EME833 Series (VDD = 1.8V, temperature measurement period = 30 seconds.)

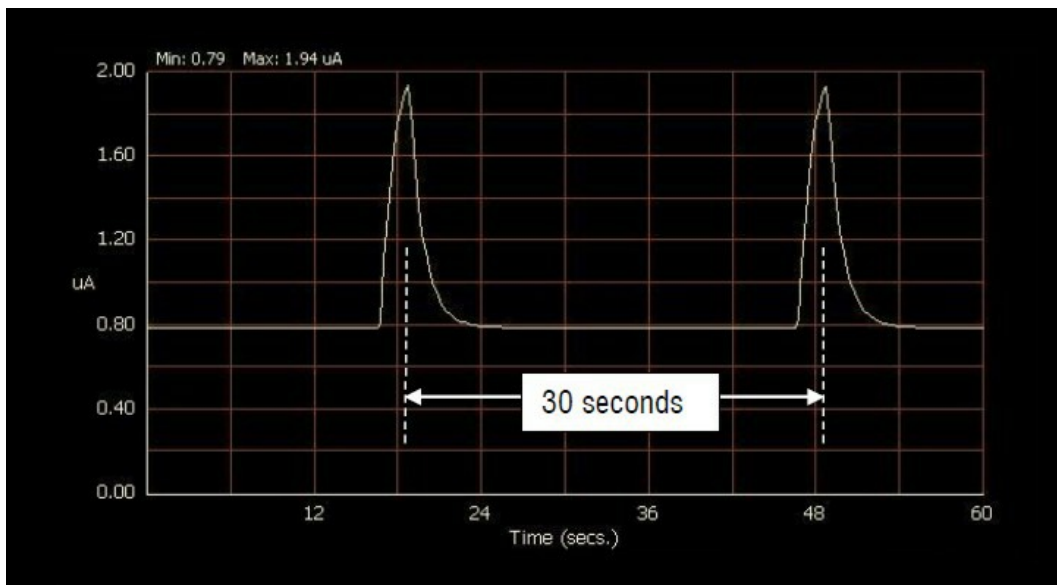

**BLOCK DIAGRAM**

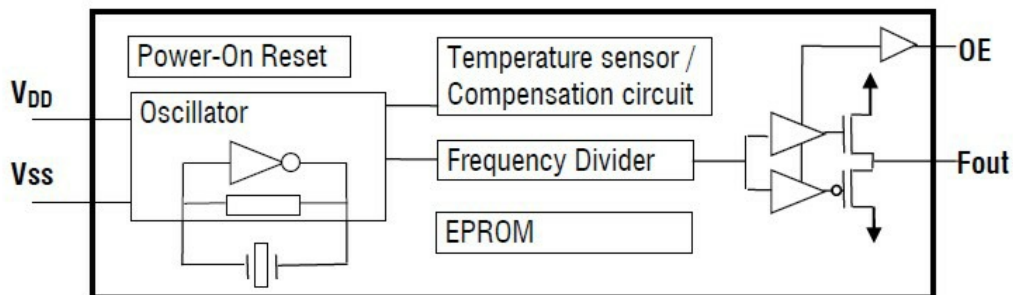


**PACKAGE DIMENSIONS and SUGGEST SOLDER LAYOUT**

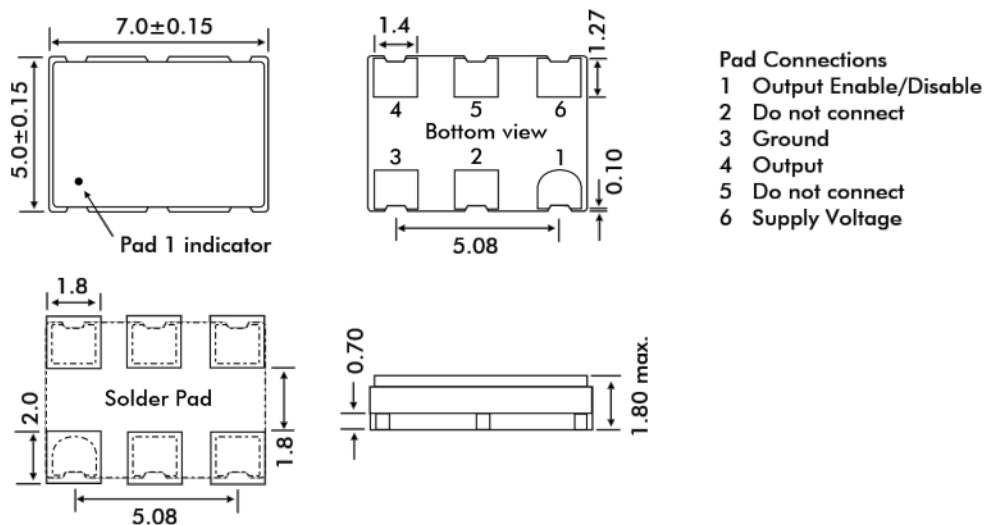

- Pad Connections
- 1 Output Enable/Disable
  - 2 Do not connect
  - 3 Ground
  - 4 Output
  - 5 Do not connect
  - 6 Supply Voltage


### PART NUMBER SCHEDULE

Example: 18EME83 4-32768

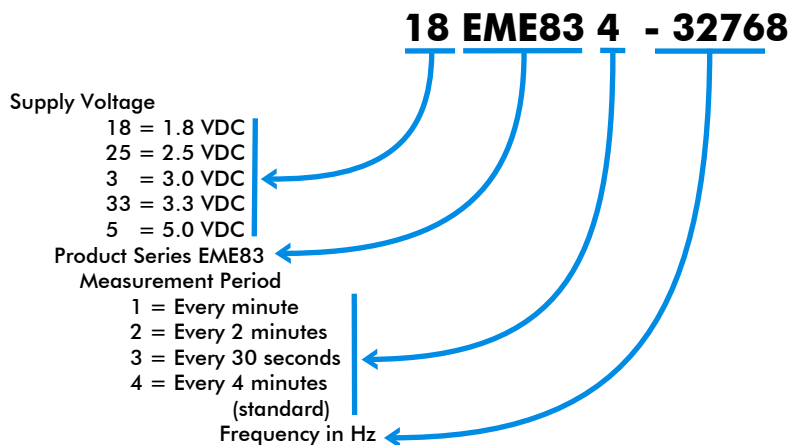

Orderable Part Numbers	Output Frequency
xxME83y-1/60	1/60Hz
xxME83y-1/10	1/10Hz
xxME83y-1	1Hz
xxME83y-32	32Hz
xxME83y-128	128Hz
xxME83y-1024	1024Hz
xxME83y-4096	4096Hz
xxME83y-32768	32768Hz

### RECOMMENDED SOLDER REFLOW PROFILE (per IPC/JEDEC J-STD-020D.1)

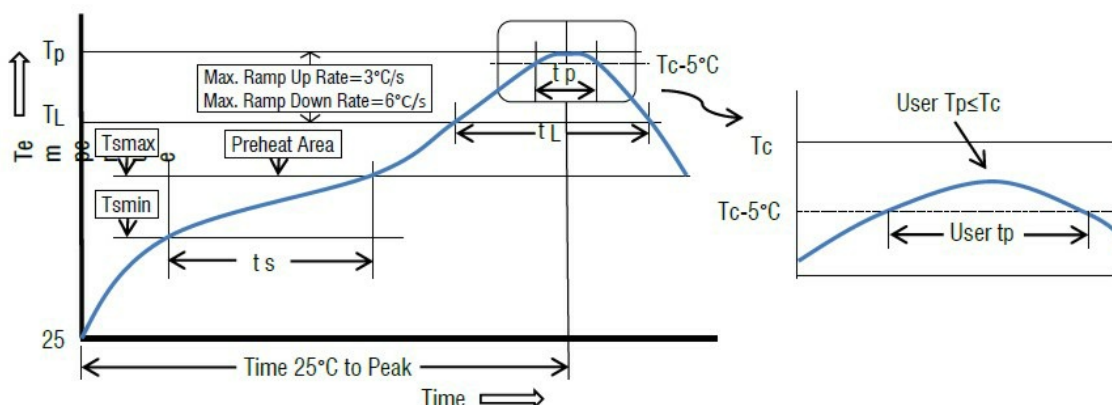

Profile Feature	Sn-Pb Eutectic Assembly	Pb-free Assembly
<b>Preheat/Soak</b>		
Temperature min. ( $T_s$ min.)	100°C	150°C
Temperature max. ( $T_s$ max.)	150°C	200°C
Time ( $t_s$ ) ( $t_s$ min. to $t_s$ max.)	60 to 120 seconds	60 to 180 seconds
Ramp-up Rate ( $T_l$ to $T_p$ )	3°C/second maximum	3°C/second maximum
Liquidous Temperature	183°C	217°C
Time ( $t_l$ ) maintained above $T_l$	60 to 150 seconds	60 to 150 seconds
Peak package body temperature ( $T_p$ )	235°C	260°C
Time ( $T_p$ ) within 5°C of the classification temperature $T_c$	10 to 30 seconds	20 to 40 seconds
Ramp-down rate ( $T_p$ to $T_l$ )	6°C/second maximum	6°C/second maximum
Time 25°C to peak temperature	6 minutes maximum	8 minutes maximum

All temperature refer to topside of the package, measured on the package body surface.