

1.8V HCMOS Automotive Grade SMD Oscillator



Model: FA4500 SERIES

RoHS Compliant / Pb Free / REACH Compliant

Rev. 5/16/2016

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

FEATURES

- AEC-Q200 Qualified
- TS-16949 Certified
- Temperature range from -40°C ~ +125°C
- Seam Seal
- Tape and Reel (2,000 pcs. STD)

• PART NUMBER SELECTION

Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
529A-Frequency-xxxxx	FA4500R	±100PPM	-40 ~ +85	2.000 ~ 48.000
528A-Frequency-xxxxx	FA4500	±100PPM	-40 ~ +125	2.000 ~ 48.000
531A-Frequency-xxxxx	FA4505R	±50PPM	-40 ~ +85	2.000 ~ 48.000
530A-Frequency-xxxxx	FA4505	±50PPM	-40 ~ +125	2.000 ~ 48.000
533A-Frequency-xxxxx	FA4506R	±25PPM	-40 ~ +85	2.000 ~ 48.000

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	2.000 ~ 48.000 MHz
Storage Temperature Range (TSTG)	-55°C ~ +150°C
Supply Voltage (VDD)	1.8V ± 5%
Input Current (IDD)	
2.000 ~ 9.999999 MHz	5 mA
10.000 ~ 31.999999 MHz	6 mA
32.000 ~ 48.000 MHz	15 mA
Output Symmetry (50% VDD)	40% ~ 60% ³
Rise/Fall Time (10% ~ 90% VDD LEVELS)	6.5nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Current (IOL)	2mA Min
(IOH)	-2mA Min
Output Load (HCMOS)	15pF
Standby Current (IST) Ta = -40 ~ +85°C	10µA
Ta = -40 ~ +125°C	20µA
Start-up Time (Ts)	10mS
Output Disable Time ²	100nS
Output Enable Time ²	10mS
Aging (per year @25°C)	±5 PPM
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au


¹ Inclusive of 25°C tolerance, operating temperature range.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

³ 45/55 symmetry available on an inquiry basis.

Notes: A 0.01µF bypass capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise.

Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

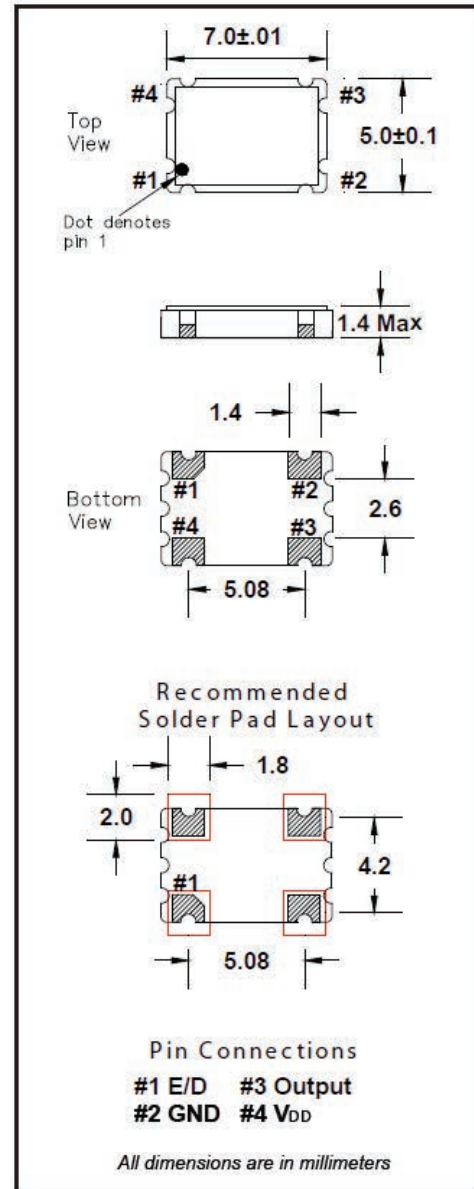

• ENABLE / DISABLE FUNCTION

(Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level $V_{IH} \geq 80\% V_{DD}$	ACTIVE
'0' Level $V_{IL} \leq 20\% V_{DD}$	High Z

1.8V HCMOS Automotive Grade SMD Oscillator



Model: FA4500 SERIES

RoHS Compliant / Pb Free / REACH Compliant

Rev. 5/16/2016


Page 2 of 2

http://www.foxonline.com/need_a_sample.htm



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
FA4500 Series	∅1.5	4.0	8.0	7.5	16.0	2.15	2,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
FA4500 Series	2.0	∅13	∅21	∅80	∅255	17.5	2.0

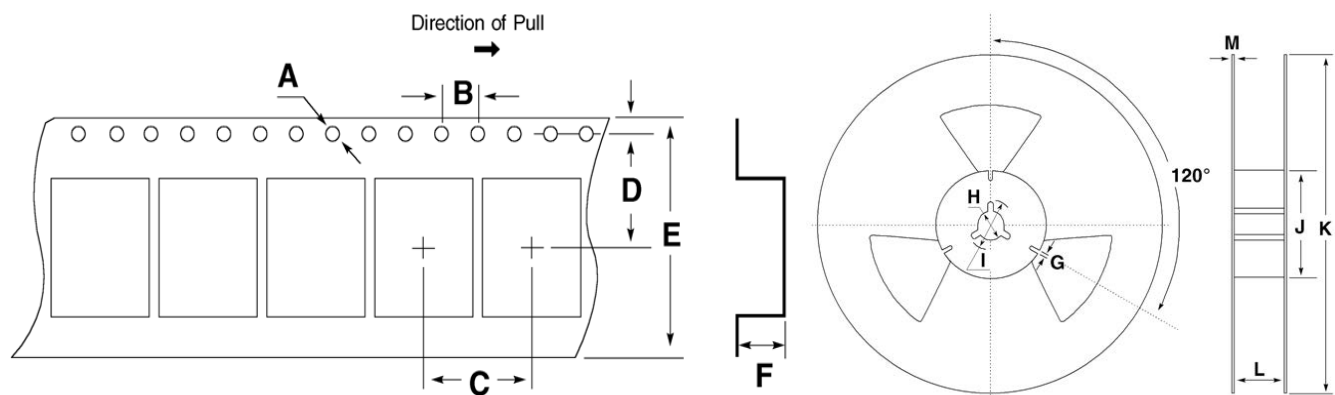

PRODUCT USE

Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. FOX products are not intended for use in life support systems or similar devices where the failure or malfunction of a FOX product can be reasonably expected to significantly affect the health or safety of users. Anyone using a FOX product in such a manner does so at their own risk, absent an express, written agreement by FOX.