

ISSUE 15; March 2016

### Description

- Cylinder 3x9mm  
Leaded crystal  
Press sealed metal can

### Frequency Parameters

- Frequency 4.0MHz to 60.0MHz
- Frequency Tolerance  $\pm 50.00\text{ppm}$
- Frequency Stability  $\pm 50.00\text{ppm}$
- Ageing  $\pm 5\text{ppm}$  max in 1st Year

### Electrical Parameters

- Load Capacitance (CL) 16.0pF
- Shunt Capacitance (C0) 5pF typical
- Drive Level 100 $\mu\text{W}$  max

### Operating Temperature Ranges

- -20 to 70°C

### Environmental Parameters

- Storage Temperature: -55°C to 125°C

### Ordering Information

- Frequency\*
- Model\*
- Frequency Tolerance (@25°C)\*
- Frequency Stability (over operating temperature range)\*
- Operating Temperature Range\*
- Load Capacitance\*
- Overtone\*
- Example  
10.0MHz CYL(3x9)  
50/50/-20 to 70C/16 FUND

### Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

### Packaging Details

- Pack Style: Bulk Loose in bulk pack  
Pack Size: 100



Outline (mm)

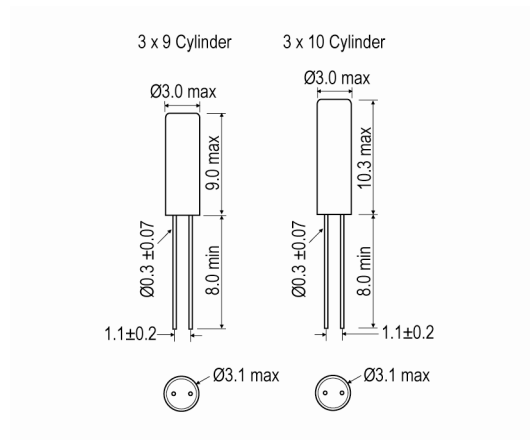

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR
		°C	ppm		Ω
4.0MHz	4.999999MHz	-20 to 70	±50	Fundamental	150
5.0MHz	5.999999MHz	-20 to 70	±50	Fundamental	120
6.0MHz	6.999999MHz	-20 to 70	±50	Fundamental	100
7.0MHz	8.999999MHz	-20 to 70	±50	Fundamental	80
9.0MHz	14.999999MHz	-20 to 70	±50	Fundamental	60
15.0MHz	19.999999MHz	-20 to 70	±50	Fundamental	50
20.0MHz	36.0MHz	-20 to 70	±50	Fundamental	40
32.0MHz	60.0MHz	-20 to 70	±50	3rd Overtone	70

\*Stability Maximum values ±50ppm

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)