

ISSUE 10; April 2016

Description

- A 5V supply, 8-pin DIL crystal oscillator in a hermetically sealed metal package designed to meet tough environmental specifications
See our IQXO-36 for product with standby function
For standard parts in this package please see our IQXO-825
For parts that meet tough environmental specifications and military temperature range please see our IQXO-85
For individually screened parts that meet tough environmental specifications and military temperature range please see our IQXO-86

Frequency Parameters

- Frequency 500.0kHz to 70.0MHz
- Frequency Tolerance $\pm 5.00\text{ppm}$ to $\pm 25.00\text{ppm}$
- Frequency Stability $\pm 25.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing $\pm 5\text{ppm}$ max per year

Electrical Parameters

- Supply Voltage 5.0V $\pm 0.25\text{V}$

Operating Temperature Ranges

- 40 to 85°C

Output Details


- Output Compatibility HCMOS/TTL
- Drive Capability 50pF max or 10TTL

Environmental Parameters

- Acceleration: 490m/s² for 1min in the 'Y1' plane
- Bump: 4000 bumps at 391m/s² in each of 3 mutually perpendicular planes
- Shock: 981m/s², 6ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: 10Hz-60Hz, 0.75mm amplitude, 60Hz-2000Hz, 98.1m/s², 30mins in each of 3 mutually perpendicular planes
- Humidity:
Steady State: In accordance with Test Ca of IEC 60068-2-3, for 56 days at 40°C at a relative humidity of 93%
Cyclic: In accordance with Test Db (variant 1) of IEC 60068-2-30, at severity b, 55°C for 6 cycles
- Solderability: In accordance with Test Ta of IEC 60068
- Rapid Change of Temperature over Operating Temperature Range:
10 cycles
- Hermetic Seal: Not to exceed 1 x 10⁻⁸ mBar litres of Helium leakage
- Storage Temperature Range: -55 to 125°C




Outline (mm)

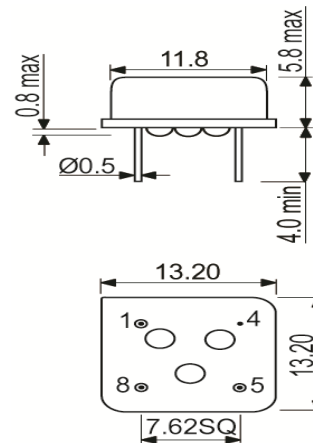

Pin Connection
 1. N/C
 4. GND
 5. Output
 8. +Vs

Test Circuit

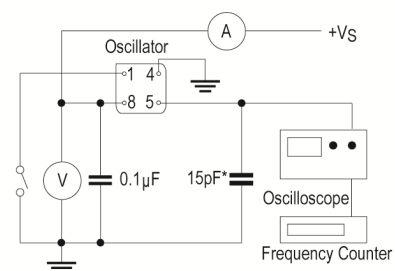

*Inclusive of jigging and equipment capacitance

Note: Pin 1 = No connection on non standby option models

Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: 0800 1808 443

France: 0800 901 383

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Ordering Information

- Frequency*
 Model*
 Output
 Frequency Tolerance*
 Frequency Stability*
 Operating Temperature Range
 Supply Voltage
 (*minimum required)
- Example
 20.0MHz IQXO-35
 HCMOS ±10ppm ±50ppm -40 to 85C 5.0V


Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JEDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
 Pack Size: 1

Wave Form

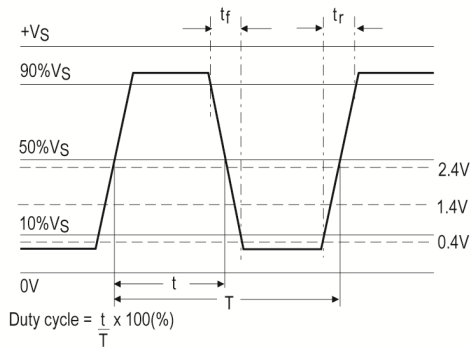

Electrical Specification - maximum limiting values 5.0V ±0.25V

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
500.0kHz	4.999999MHz	-40 to 85	±25.0	20	15	45/55%
5.0MHz	15.999999MHz	-40 to 85	±25.0	20	10	45/55%
16.0MHz	29.999999MHz	-40 to 85	±25.0	30	10	45/55%
30.0MHz	49.999999MHz	-40 to 85	±25.0	40	8	45/55%
50.0MHz	70.0MHz	-40 to 85	±25.0	50	6	40/60%

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com