

ISSUE 1; July 2016


### Description

- The IQXT-272 employs an analogue ASIC for the oscillator and a high order temperature compensation circuit in a 2.0 x 1.6mm size package. The device can be placed in power down mode through a single input pin. During standard operation, power consumption is minimised by operating down to a supply voltage of 1.8V. The IQXT-272's high stability, low power consumption, small footprint and powerful compensation method makes it a TCXO ideally suited for demanding GPS mobile applications.
- Applications:  
Communications  
Consumer  
GPS
- Features:  
Excellent phase noise performance  
Low start up drift rate  
Height less than 0.8mm  
Operates at 1.8V supply  
Power Down Mode  
Temperature sensor  
Standard temperature stability of  $\pm 0.5\text{ppm}$  over wide temperature ranges


### Frequency Parameters

- Frequency 13.0MHz to 52.0MHz
- Frequency Tolerance  $\pm 2.00\text{ppm}$
- Frequency Stability  $\pm 0.50\text{ppm}$  to  $\pm 2.00\text{ppm}$
- Frequency calibration + reflow: Offset from the nominal frequency measured at  $25^\circ\text{C} \pm 2^\circ\text{C}$ . Two consecutive reflows as per profile after 2 hours relaxation at  $25^\circ\text{C}$
- Frequency stability over temperature: referenced to the midpoint between minimum and maximum frequency value over the specified temperature range. Control voltage set to midpoint of control voltage (Note 1)
- Frequency slope, minimum of 1 frequency reading every  $2^\circ\text{C}$ , over the operating temperature range (Note 1):  $0.05$  to  $1\text{ppm}/^\circ\text{C}$
- Static temperature hysteresis: frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at  $25^\circ\text{C}$ :  $\pm 0.6\text{ppm}$  max
- Supply voltage variation ( $\pm 5\%$  change at  $25^\circ\text{C}$ ):  $\pm 0.1\text{ppm}$  max
- Load variation ( $\pm 10\%$  change, note 2):  $\pm 0.2\text{ppm}$  max
- Long term stability, frequency drift over 1 year at  $25^\circ\text{C}$ :  $\pm 1\text{ppm}$  max


### Outline (mm) Pad 1 GND/NC

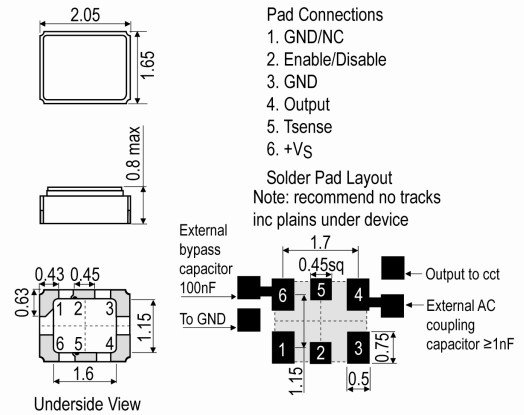

### Outline (mm) Pad 1 VC

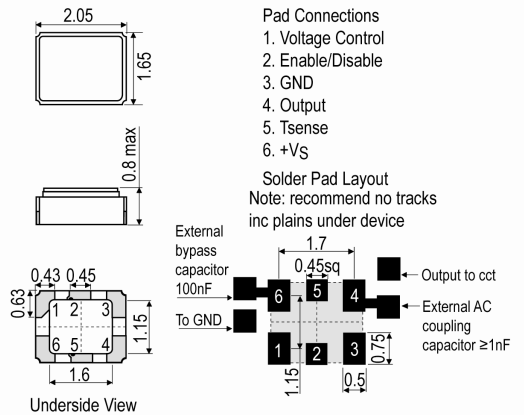

### Pb-Free Reflow

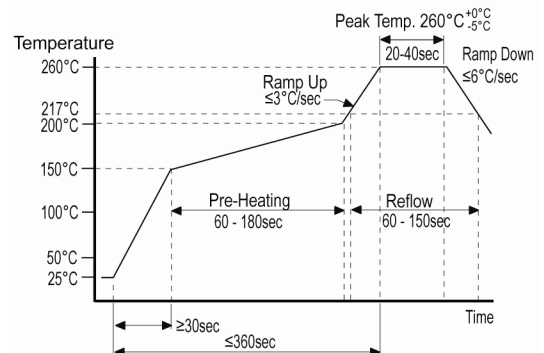

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Electrical Parameters**

- Supply voltage range: 1.8 to 3.0V
- Supply current (see note 2)
- Temperature Sensor:  
Temperature sensor output voltage at 25°C: 0.85 to 1.05V  
Temperature sensor slope: -8.9 to -8.5 mV/°C  
Temperature sensor output impedance at 25°C: 1.5kΩ max
- Note 1: Parts should be shielded from drafts causing unexpected thermal gradients. Temperature changes due to ambient air currents can lead to short term frequency drift.
- Note 2: Specified for the load stated in the oscillator output section at 25°C
- Note 3: External AC-Coupling capacitor required. 1nF or greater recommended.
- Note 4: Frequency shift ≤1ppm after environmental conditions

**Frequency Adjustment**

- Pulling ±6ppm to ±30ppm
- Input Impedance 500kΩ min
- Control voltage range: The nominal control voltage value is midway between the minimum and maximum. Voltage control should not exceed the supply voltage +0.2V or GND.  
Supply voltage ≤2.3V: 0.3 to 1.5V  
Supply voltage >2.3V: 0.4 to 2.4V
- Linearity (deviation from straight line curve fit): 10% max

**Operating Temperature Ranges**

- -40 to 85°C

**Output Details**

- Output Compatibility Clipped Sine
- Drive Capability 10kΩ//10pF ±10%
- Output: DC coupled (see note 3)
- Output voltage level (at min supply voltage): 0.8V min (Note 2)

**Output Control**

- Power Down Mode:  
Logic low (20%Vs max) to E/D disables output.  
Logic high (80%Vs min) to E/D enables output.
- Standby current: 0.01μA max
- Start-Up Time (amplitude) within 90% of specified output: 0.5ms max
- Start-Up Time (frequency) within ±0.5ppm of steady state: 2ms max

**Noise Parameters**

- Phase Noise (typ @ 26MHz):  
-62dBc/Hz @ 1Hz  
-86dBc/Hz @ 10Hz  
-109dBc/Hz @ 100Hz  
-132dBc/Hz @ 1kHz  
-148dBc/Hz @ 10kHz  
-149dBc/Hz @ 100kHz

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

#### Environmental Parameters

- Shock [MIL-STD-202 M213] (Note 4): Half sine-wave acceleration of 3000G peak amplitude. Duration: 0.3ms, Velocity: 12.3ft/s
- Moisture resistance [MIL-STD-202 M106g] (Note 4): 1000 hours at 85°C, 85% relative humidity. Biased.
- Thermal cycling [JESD22 METHOD JA-104C] (Note 4): 1000 temperature cycles, where each cycle consists of a 25 minutes soak time at -40°C followed by a 25 minute soak time at 85°C, with a 60 second maximum transition time between temperatures. Air to air transition.
- Vibration [JESD22-B103-B] (Note 4): 10G peak acceleration for 4 minutes per sweep. 4 sweeps in each of the 3 orientations. Swept from 20-2000Hz
- Storage Temperature Range: -40 to 85°C

#### Ordering Information

- \*minimum information required
- Frequency\*
- Model\*
- Supply Voltage\*
- Pad 1 function\*
- Frequency Stability\*
- Operating Temperature Range\*

#### Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

#### Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
- Pack Size: 4,000

#### Electrical Specification - maximum limiting values

Frequency	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
13.0MHz	52.0MHz	-40 to 85	±0.5	2.2	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

#### Chipset Approval Table

IQD Model	Ref No.	Frequency	Chipset Type	IC Supplier	
IQXT-272-1	509160	26MHz	SirfStar 5 (SS5)	CSR	

#### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)