

ISSUE 4; April 2016

Description

- Plastic moulded surface mount watch crystal

Frequency Parameters

- Frequency: 32.768kHz
- Frequency Tolerance: ±20.00ppm
- Tolerance Condition: @ 25°C ±2°C
- Ageing: ±3ppm max in 1st year @ 25°C
- Operable Temperature Range: -40 to 85°C

Electrical Parameters

- Load Capacitance (CL): 7.0pF to 12.5pF
- Shunt Capacitance (C0): 0.8pF typ
- Drive Level: 1.0µW max
- Motional Capacitance (C1): 1.9fF typ

Operating Temperature Ranges

- 40 to 85°C

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Drop: 75cm drop (3 times) onto hard wooden board
- Vibration: 1.5mm amplitude, 10Hz-60Hz, 2-3mins in 3 mutually perpendicular planes, duration 2hrs each plane
- Thermal Shock: 20 cycles of -25°C to 80°C over a duration of 30mins

Ordering Information

- Frequency*
Model*
Frequency Tolerance (@ 25°C)
Load Capacitance*
(*minimum required)
- Example
32.768kHz CFPX-155
20/-/12.5

Compliance


- RoHS Status (2011/65/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details


- Pack Style: Reel: Tape & reel in accordance with EIA-481-D
Pack Size: 3,000
- Pack Style: Cutt: In tape, cut from a reel
Pack Size: 1
- Pack Style: Bulk: Loose in bulk pack
Pack Size: 100



Outline (mm)

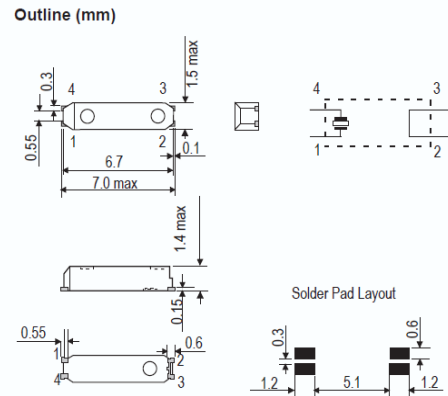

Typical Frequency Stability Characteristic

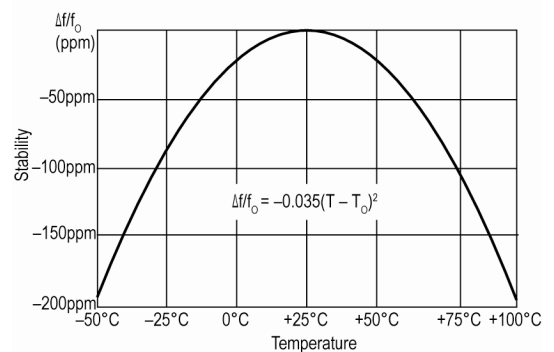

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Electrical Specification - maximum limiting values

Frequency	Temperature Range	Stability (Min)	Over Tone Order	ESR
	°C	ppm		Ω
32.768000kHz	-40 to 85	-	Fundamental	65,000

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com