

ISSUE 2; June 2016

**Description**

- 3.2 x 2.5mm SMD crystal.  
Ceramic package with a seam sealed metal lid, hermetically sealed.  
Suitable for Industrial applications qualified to AEC-Q200.  
Please see our CFPX-180 for standard stock alternative.
- B variant = 4 Pad Layout (Standard)

**Frequency Parameters**

- Frequency 16.0MHz to 32.0MHz
- Frequency Tolerance  $\pm 10.00\text{ppm}$  to  $\pm 50.00\text{ppm}$
- Frequency Stability  $\pm 15.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Ageing  $\pm 5\text{ppm}$  max per year @ 25°C

**Electrical Parameters**

- Load Capacitance (CL) 8.0pF
- Shunt Capacitance (C0) 7pF max
- Drive Level 50µW standard

**Operating Temperature Ranges**

- -40 to 85°C
- -20 to 125°C

**Environmental Parameters**

- Storage Temperature Range: -40 to 150°C
- Qualified to AEC-Q200

**Ordering Information**


- Frequency\*  
Model\*  
Frequency Tolerance (@25°C)\*  
Frequency Stability (over operating temperature range)\*  
Operating Temperature Range\*  
Load Capacitance\*  
Overtone
- Example  
20.00MHz IQXC-32-B  
30/50/-40 to 85C/8 FUND

**Compliance**


- RoHS Status (2011/65/EU) Compliant
- REACh Status Compliant
- MSL Rating (JEDEC-STD-033): Not Applicable

**Packaging Details**

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
- Pack Size: 3,000

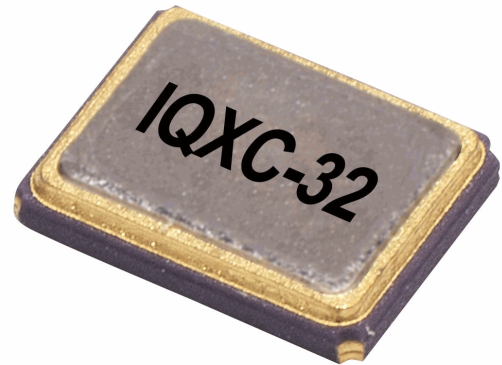

**Outline (mm) B = variant = 4 Pad Layout (Standard)**

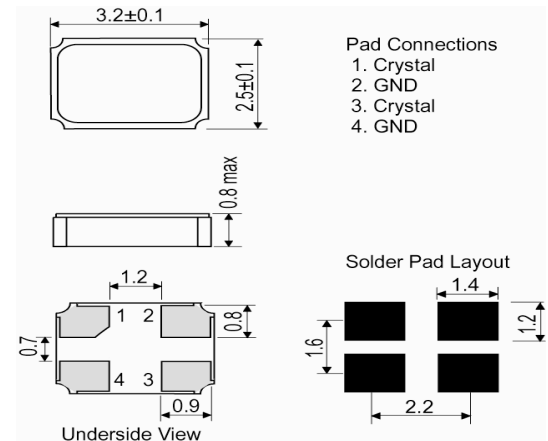

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Electrical Specification - maximum limiting values**

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR
		°C	ppm		Ω
16.0MHz	26.0MHz	-20 to 125 -40 to 85	±50 ±15	Fundamental	100
26.000001MHz	32.0MHz	-20 to 125 -40 to 85	±50 ±15	Fundamental	50

\*Stability Maximum values ±100ppm

*This document was correct at the time of printing; please contact your local sales office for the latest version.*

[Click to view latest version on our website.](#)

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)