


## 7 x 5 x 2.3mm SMD HCMOS

- Quick turnaround production
- Low Jitter: 70ps peak to peak (typical)
- Low phase noise: -114dBc at 1kHz offset (133MHz)
- Custom frequencies are easily configured
- Supply voltages 2.8V, 3.0V or 3.3VDC
- TCXO or VCTCXOs CMOS square wave output




### DESCRIPTION

The MB572T TCXO is packaged in 7 x 5mm, 4 pad ceramic SMD package. The part has a squarewave (CMOS) output and a tight stability over temperature. The part may be specified as a TCXO or a Voltage-Controlled TCXO (VCTCXO). A 0.01µF decoupling capacitor is built-in.

### SPECIFICATION

Product Series Code	TCXO: MB572T VCTCXO: VMB572T
Frequency Range:	1.0MHz to 200.0MHz
Output Waveform:	Squarewave, HCMOS
Initial Calibration Tolerance:	<math>\pm 2.0\text{ppm}</math> at +25°±2°C
Frequency Stability	
vs. Temperature Change:	See table
vs. Ageing:	±1.0 ppm max. first year
vs. Voltage Change:	±0.3 ppm max. ±5% change
vs. Load Change:	±0.3 ppm max. ±10% change
vs. Reflow (SMD type):	±1.0ppm max. for one reflow (Measured after 24 hours)
Supply Voltage:	+2.8VDC ±5% +3.0VDC ±5% +3.3VDC ±5%
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.
Rise and Fall Times:	10ns max.
Duty Cycle:	50±10% standard, 50±5% option
Start-up Time:	5ms typical, 10ms max.
Current Consumption	
at 25.0MHz:	8mA max.
at 200.0MHz:	20mA max.
Output Load:	15pF
Storage Temperature:	-55~+125°C
RoHS Status:	RoHS Compliant and pB free

### MB572T - OUTLINES AND DIMENSIONS

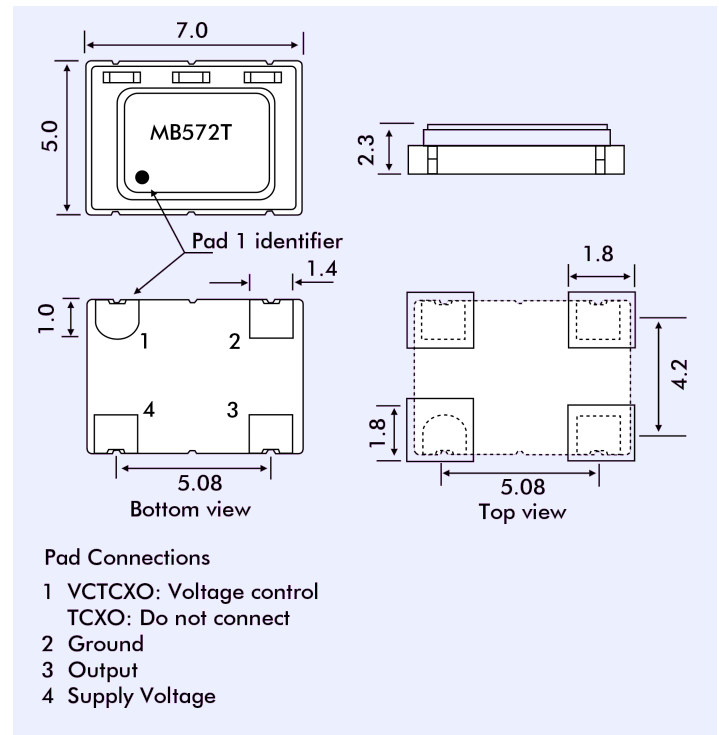

### VMB572T VOLTAGE CONTROL SPECIFICATION

Control Voltage Centre:	Standard = +1.5±1.0Volts (for all voltages)
Frequency Deviation:	±5.0ppm min. (Vcon = +1.5V±1.0V)
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	50kΩ minimum
Modulation Bandwidth:	20kHz minimum
Linearity:	±10% maximum

### FREQUENCY STABILITY OVER TEMPERATURE

Frequency Stability (ppm)	±0.5	±1.0	±1.5	±2.0	±2.5	±3.0
0 ~ +50	✓	✓	✓	✓	✓	✓
-10 ~ +60	ASK	✓	✓	✓	✓	✓
-20 ~ +70	x	✓	✓	✓	✓	✓
-30 ~ +75	x	✓	✓	✓	✓	✓
-40 ~ +85	x	✓	✓	✓	✓	✓

✓ = available, x = not available, ASK = Please contact us

### SSB PHASE NOISE at 25°C

Offset	10Hz	100Hz	1kHz	10kHz	100k Hz
MB53T at 133.333MHz (dBc/Hz)	-76	-102	-114	-110	-100

### PART NUMBER FORMAT

Example: **MB572T 28 - 38.880 - 2.5 / -30+85**

Series Description

TCXO: MB572T

VCTCXO: VMB572T

Supply Voltage

28: 2.8VDC

30: 3.0VDC

33: 3.3VDC

Frequency MHz

Stability ±ppm

Operating Temperature Range