



CC6A-T1D

AT-Cut Crystal 16 MHz – 70 MHz

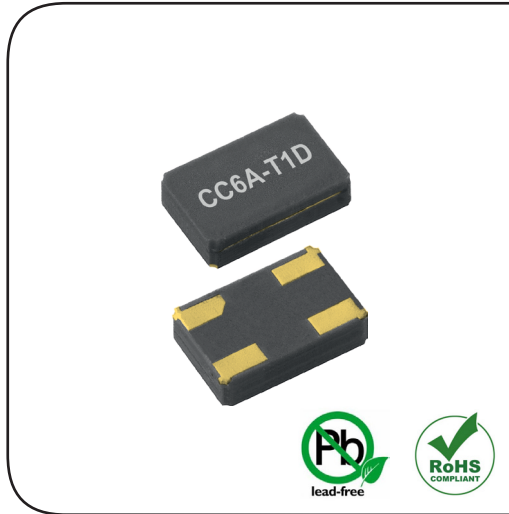

DIMENSIONS

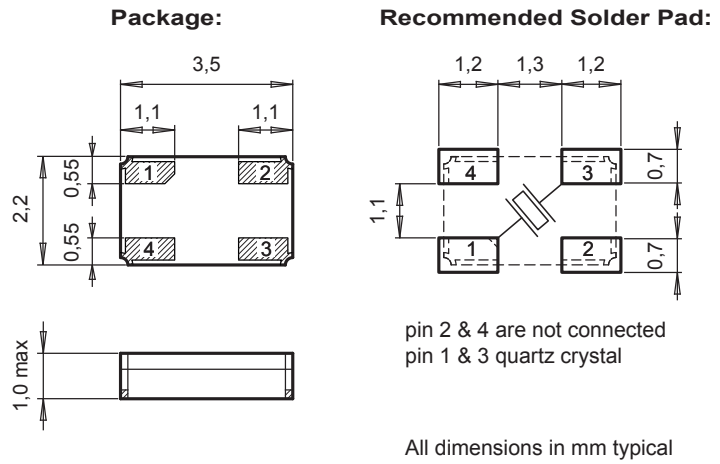

APPLICATIONS

Telemetry
Optical Network
Airborne Equipment
Radio Communications
Health Care and Medical

DESCRIPTION

The CC6A-T1D is a high frequency SMT Quartz Crystal Unit that incorporates an AT-cut Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed ceramic package with ceramic lid.

FEATURES

Outstanding hermetic sealing with gold-tin preform.
High stability and low aging guaranteed by hermetic sealing.
Available for extended operating temperature range.
Operates in fundamental mode.
High shock and vibration resistant.
100% Pb-free, RoHS-compliant.

ELECTRICAL CHARACTERISTICS AT 25°C

Frequency Range	F_L	16 – 70	MHz
Load capacitance ¹⁾	C_L	20.0	pF
Frequency tolerance at +25°C ²⁾	$\Delta F/F$	±50	ppm
Frequency vs. temperature ³⁾ TA: -40 to +85°C TB: -40 to +125°C TC: -55 to +125°C	$\Delta F/F_0$	±50 ±80 ±100	ppm
Drive level typ./max.	P	100 / 250	µW
Insulation resistance min.	R_i	500	MΩ
Aging first year max.	$\Delta F/F$	±3	ppm

- 1) Other load capacitances on request; e.g. C_L : 9,0 pF.
2) Tighter frequency tolerances on request; e.g. ±20 ppm.
3) Tighter thermal stability on request; e.g. ±10 ppm from 0°C to +55°C.

Frequency	R_s typ./max.	C_1 typ./max.	C_0 typ.
16.000 MHz to 19.999 MHz	60 Ω / 120 Ω	2.0 fF / 4.0 fF	1.5 pF
20.000 MHz to 23.999 MHz	40 Ω / 85 Ω	3.0 fF / 5.0 fF	2.0 pF
24.000 MHz to 39.999 MHz	30 Ω / 50 Ω	4.0 fF / 6.0 fF	2.5 pF
40.000 MHz to 70.000 MHz	20 Ω / 40 Ω	5.0 fF / 8.0 fF	3.0 pF

STANDARD FREQUENCIES

Frequencies			
16.000 MHz	20.000 MHz	24.000 MHz	40.000 MHz
Other frequencies on request			

ENVIRONMENTAL CHARACTERISTICS

	Conditions
Storage temp. range	-55 to +125°C
TA Operating temperature range	-40 to +85°C
TB Extended operating temp. range	-40 to +125°C
TC Extended operating temp. range	-55 to +125°C
Shock resistance	5000 g, 0.3 ms, ½ sine
Vibration resistance	20 g / 10–2000 Hz

TERMINATIONS AND PROCESSING

Type	Termination	Processing
CC6A-T1D	Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s
CC6A-T3D	Sn/Ag/Cu solder dipped pads	

ORDERING INFORMATION

C C 6 A - T 1 D 24.000 MHz 20.0 pF ±50 ppm TA QI	
Ceramic package	Frequency F_L
Ceramic lid	Load capacitance C_L
Package size 6 = 3.5 x 2.2 x 1.0 mm	20.0 pF Other C_L on request
AT-cut	Frequency tolerance
SMT package	±50 ppm Tighter freq. tolerances on request
Pads	Temperature range
1 = Au flashed pads	TA = -40 to +85°C (Standard)
3 = Sn/Ag/Cu solder dipped pads	TB = -40 to +125°C
4-pads	TC = -55 to +125°C
	Qualification
	QI = Industrial Grade (Standard)
	QS = Custom Specification

A unique part number will be generated for each product specification, i.e:	
20xxxx-MG01	1'000 pcs (in 12 mm tape on 7" reel)
20xxxx-MG03	3'000 pcs (in 12 mm tape on 7" reel)
20xxxx-EA00	xxx pcs (in ESD plastic tray)

All specifications subject to change without notice.



Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com