




DIMENSIONS

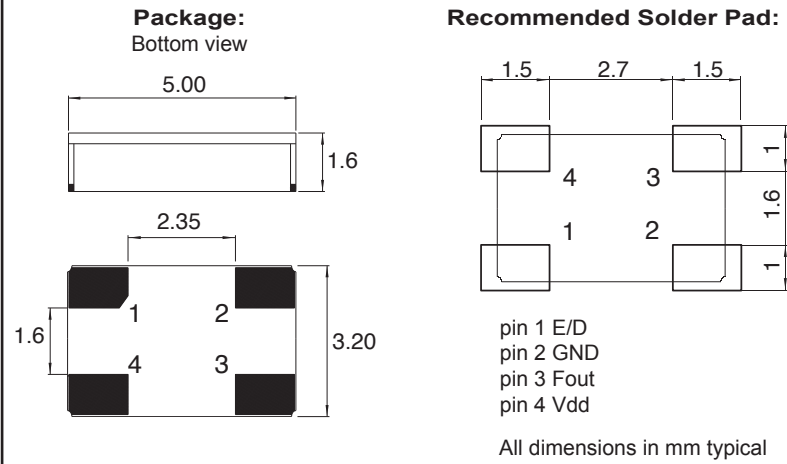

SMT Clock oscillator in ceramic package
Fundamental quartz mode frequency
High shock and vibration resistance
Wide temperature range
Low aging
Ultra low internal MSL
Very fast start-up
Excellent solderability
Swiss made quality
Customer specification on request

DESCRIPTION:

This SMD oscillator in ceramic package has been specially designed for surface mount using infrared, vapor phase or epoxy techniques.

APPLICATIONS:

- Avionics
- Airbone equipments
- Remote control
- Security application
- Radio Transceiver
- Microprocessor clocks

The MCSO2's are supplied on trays (128 pcs / tray)
 For pick-and-place equipment, the parts are available in 12mm tapes
 with 250 parts min
 1000 parts min

ELECTRICAL CHARACTERISTICS AT +25°C

Frequency stability Over temperature range (see ordering info) Including: adjustment at 25°C long term aging 10 years over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 100$	ppm
Frequency stability version T Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 1 year over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 50$	ppm
Supply voltage ± 5%	Vdd	1.8 / 2.5 / 3.3 / 5	V
Input current	Idd	see table 1	
Output signal		HC-MOS compatible	
Symmetry at Vdd/2		40 / 60	%
Rise & fall time ≤ 20MHz For F=32.768 kHz rise & fall time ≤ 150ns (load 15pf 20% to 80%)		≤7	ns
Rise & fall time ≥ 20MHz (load 15pf 10% to 90%)		≤3	ns
Level "0" & "1"		<0.4>Vdd-0.5	V
Start-up time	t	<5	ms
Load min / max		3/47	pF

* 1) C = 47nF ceramic must be connected between GND & Vdd

