


MS3V-T1R

Tuning Fork Crystal 32 kHz – 100 kHz



DIMENSIONS

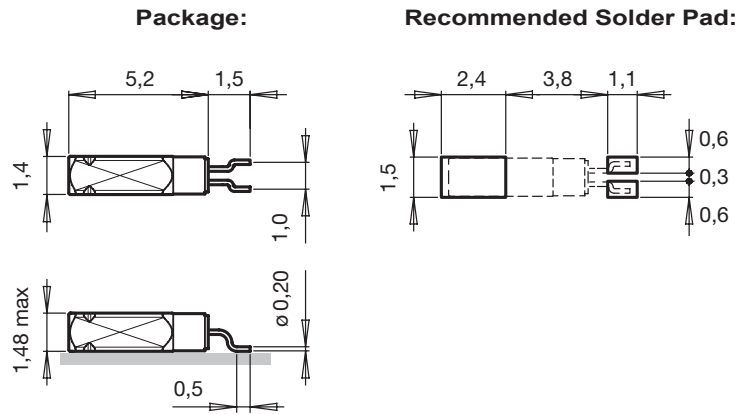

All dimensions in mm typical

APPLICATIONS

IoT
Metering
Wearables
Health Care
Mobile Phones
Consumer Electronics

DESCRIPTION

The MS3V-T1R is a low frequency surface mount technology Quartz Crystal Unit that incorporates a tuning fork Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed square-bodied metal can package.

FEATURES

High stability is guaranteed by hermetic sealing.
High shock and vibration resistant.
Small, proven surface mount technology package for reflow soldering.
Excellent lead coplanarity for surface mounting.
RoHS-compliant.

ELECTRICAL CHARACTERISTICS AT 25°C

Standard Frequency	¹⁾	F_L	32.768	kHz
Load capacitance	²⁾	C_L	6.0 / 7.0 / 9.0 / 12.5	pF
Frequency tolerance	³⁾	$\Delta F/F$	±20	ppm
		$\Delta F/F$	±100	ppm
Series resistance typ./max.		R_S	50 / 65	kΩ
Motional capacitance typ.		C_1	2.25	fF
Static capacitance typ.		C_0	0.9	pF
Drive level max.		P	1.0	μW
Insulation resistance min.		R_i	500	MΩ
Aging first year max.		$\Delta F/F$	±3	ppm
Turnover temperature		T_0	25 ±5	°C
Frequency vs. temperature		$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \pm 10\%$	ppm

- 1) Other frequencies on request.
2) Other load capacitances on request.
3) Tighter and wider frequency tolerances on request.

STANDARD FREQUENCIES

Frequencies		
32.768 kHz	60.000 kHz	76.800 kHz
Other frequencies on request		

ENVIRONMENTAL CHARACTERISTICS

		Conditions	Max. Dev.
Storage temperature range		-55 to +85°C	
TA Operating temperature range		-40 to +85°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	±5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	±5 ppm

TERMINATIONS AND PROCESSING

Type	Termination	Processing
MS3V-T1R	Can: Au flashed ¹⁾ Leads: Formed leads Au flashed	For surface mounting IPC/JEDEC J-STD-020C 260°C / 20 - 40 s
MS3V-T1N	Can: Au flashed ¹⁾ Leads: Straight leads Au flashed	For through-hole mounting IPC/JEDEC J-STD-020C 260°C / 20 - 40 s

1) Pd plated can on request.

ORDERING INFORMATION

<p>MS3V-T1R</p> <p>Square metal package MS3V = 1.4 x 1.4 x 5.2 mm</p> <p>SMT Package</p> <p>Au flashed leads</p> <p>Package lead form R = SMD spacing 1.0 mm N = Straight leads</p>	<p>32.768 kHz Frequency F_L</p> <p>12.5 pF Load capacitance C_L 6.0 pF 7.0 pF 9.0 pF 12.5 pF Other C_L on request</p> <p>±20 ppm Frequency tolerance ±20 ppm ±100 ppm Tighter and wider freq. tolerances on request</p> <p>TA Temperature range TA = -40 to +85°C</p> <p>QC Qualification QC = Commercial Grade</p> <p>Au Au flashed can</p>
--	---

A unique part number will be generated for each product specification, i.e:		
20xxx-ML02	2'000 pcs (in 16 mm tape on 7" reel)	MS3V-T1R
20xxx-PL09	9'000 pcs (in 16 mm tape on 13" reel)	MS3V-T1R
20xxx-BA01	1'000 pcs (in plastic bag)	MS3V-T1N

All specifications subject to change without notice.



Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com