

## Specification for a Sine Output OCXO MtronPTI P/N: XO5089-Series

Frequency offering: 10MHz to 40MHz

High Stability, Low Aging and Ultra-Low Phase Noise

Custom features: low g-sens available

Applications: Test Equipment, Satcom, RADAR



### Electrical Specifications for Representative 10MHz OCXO

Unless otherwise specified; T = +25°C, V<sub>S</sub> = +5V<sub>DC</sub>, V<sub>C</sub> = +2.5V<sub>DC</sub>, Load = 50Ω

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Nominal Frequency	F <sub>O</sub>		10.000000		MHz	
Initial Frequency		-100		+100	ppb	At time of shipment
Frequency Stabilities						
vs. Temperature Range		-10		+10	ppb	-20°C to +70°C
vs. Supply Voltage		-2.5		+2.5	ppb	±5% change in voltage
vs. Load		-2.5		+2.5	ppb	±5% change in load
Aging/Day		-0.5		+0.5	ppb	After 30-days Power On
Aging/Year		-100		+100	ppb	
Short Term Stability (Allan deviation)				1	x10 <sup>-11</sup>	Per Second.
RF Output						
Output Type	Sinewave					
Output Load			50		Ω	±5%
Level	V <sub>OH</sub>		+10		dBm	In a 50Ω load
Frequency Adjustment						
Method	External Voltage Tuned					
Tuning Slope	Positive					
Tuning Voltage	V <sub>TUNE</sub>	0		+5	V <sub>DC</sub>	
Modulation Bandwidth		1			kHz	
Other Parameters						
Standard Phase Noise Option						
				-105	dBc/Hz	@ 1Hz Offset
				-137		@ 10Hz Offset
				-155		@ 100Hz Offset
				-162		@ 1kHz Offset
				-169		@ 10kHz Offset
				-169		@ 100kHz Offset
	Low Phase Noise Option					
				-112	dBc/Hz	@ 1Hz Offset
				-142		@ 10Hz Offset
				-155		@ 100Hz Offset
				-162		@ 1kHz Offset
				-170		@ 10kHz Offset
				-170		@ 100kHz Offset

## Specification for a Sine Output OCXO MtronPTI P/N: XO5089-Series




Ultra-low phase noise option						
				-115	dBc/Hz	@ 1Hz Offset
				-143		@ 10Hz Offset
				-158		@ 100Hz Offset
				-165		@ 1kHz Offset
				-170		@ 10kHz Offset
				-172		@ 100kHz Offset
Warm-up Time	$\Delta F/F$			5	Minutes	To be within $\pm 100$ ppb, @ 25°C, referenced to the frequency after 24-hour power on
Harmonics				-30	dBc	
Spurious				-80	dBc	
Vref			4.1		V	
Supply Voltage & Power Consumption						
Supply Voltage	$V_S$	4.75	5.0	5.25	$V_{DC}$	
Power Consumption				2.5	Watts	Steady state @ 25°C, in still air
				4.5	Watts	In still air @ turn on

### Environmental Conditions:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Operating Temperature	OTR	-20		+70	°C	
Storage Temperature	STR	-55		+85	°C	
Vibration (survival)	Per MIL-STD 202G, Method 204, Condition A					
Shock (survival)	Per MIL-STD 202G, Method 213, Condition C					
Solderability	Per EIAJ-STD-002					
RoHS	Full RoHS Compliance					

### Mechanical, marking and pin out Information:

#### Thru-hole option:




Pin	Function
1	RF Output
2	Case Ground
3	Vtune
4	Vref
5	Supply Voltage

Pin Numbers Shown For Reference Only  
All Dimensions are in Inches

## Specification for a Sine Output OCXO MtronPTI P/N: XO5089-Series


### SMT Option:

Pin	Function
1	RF Output
4	Case Gnd
7	V <sub>Tune</sub>
8	V <sub>ref</sub>
19	Supply Voltage

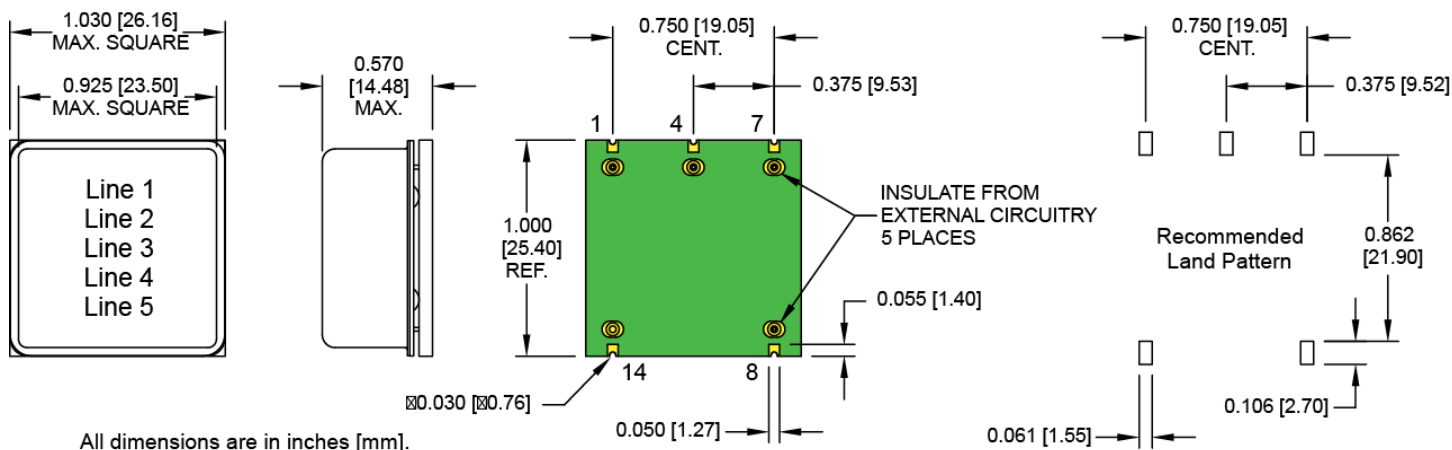

Part Marking	
Line 1	MtronPTI
Line 2	XO5089-0xxR
Line 3	10.000MHz
Line 4	Serial Number
Line 5	Date Code

### Reflow Profile for SMT Version:

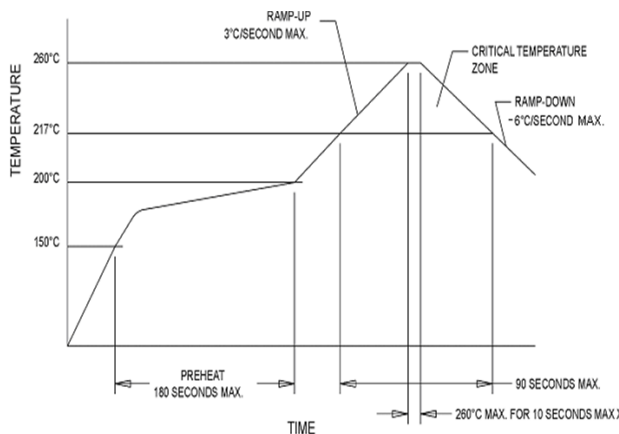

### Data Sheet Revision Table:

Date	Rev.	Orig.	Details of Revision
05-05-16	A	DPD	Original Release.