

CRYSTAL OSCILLATOR UNIT WITH HCMOS OUTPUT IN CERAMIC SEAM SEAL SMD PACKAGE, SIZE 7.0 x 5.0MM.


SCO3

PRODUCT FEATURES

- SMD PACKAGE SIZE 7.0 x 5.0 x 1.3MM WITH 4 PADS.
- HIGHLY RELIABLE SEAM SEAL PACKAGE AND LOW AGING.
- EXCELLENT HEAT AND SHOCK RESISTANCE.
- AUTOMOTIVE GRADE COMPLIANT TO AEC-Q200 IS AVAILABLE.

APPLICATIONS

- MICROPROCESSOR
- MOTHERBOARD, VGA CARD
- LAN, WLAN, MODEMS
- HDTV, SET-TOP BOX

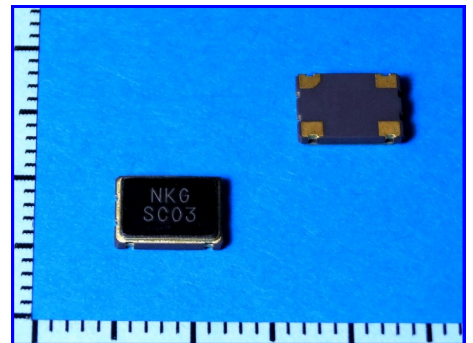


PRODUCT SPECIFICATIONS

PARAMETER	SYMBOL	PARAMETER VALUES / LIMITS	CONDITIONS / REMARKS								
NOMINAL FREQUENCY	F_N	1.0 ~ 160MHz	FUNDAMENTAL OR 3RD OVERTONE DESIGN								
SUPPLY VOLTAGE RANGE	V_{DD}	1.8V / 2.5V / 3.3V / 5.5V	MORE AVAILABLE, PLEASE CONTACT US								
SUPPLY CURRENT CONSUMPTION	I_{DD}	<25mA	TYPICAL, SEE NOTE 1								
OVERALL FREQUENCY STABILITY	$\Delta f/F_N$	± 20 PPM, ± 25 PPM, ± 50 PPM	SEE NOTE 2, OTHERS AVAILABLE								
OPERATING TEMPERATURE RANGE	T_{OP}	-10°C ~ +70°C OR -40°C ~ +85°C	OTHER OPTIONS AVAILABLE								
AGING FIRST YEAR	$(\Delta f/F_N)y_1$	± 3 PPM	@+25°C								
OUTPUT WAVEFORM / LOAD	— / C_L	HCMOS / 15PF	TYPICAL MOST COMMON, OTHERS AVAILABLE								
OUTPUT VOLTAGE LEVELS	V_{OH} / V_{OL}	$\geq 90\%V_{DD}$ / $\leq 10\%V_{DD}$	—								
RISE AND FALL TIMES	t_R AND t_F	<table border="1"> <tr> <td>≤ 8ns</td> <td>below 16MHz</td> <td>≤ 4ns</td> <td>40~100MHz</td> </tr> <tr> <td>≤ 5ns</td> <td>16~40MHz</td> <td>≤ 2ns</td> <td>above 100MHz</td> </tr> </table>	≤ 8 ns	below 16MHz	≤ 4 ns	40~100MHz	≤ 5 ns	16~40MHz	≤ 2 ns	above 100MHz	@10%~90%~10% V_{DD} , $V_{DD}=3.3V$
≤ 8 ns	below 16MHz	≤ 4 ns	40~100MHz								
≤ 5 ns	16~40MHz	≤ 2 ns	above 100MHz								
OUTPUT SYMMETRY (DUTY CYCLE)	DC	40/60% OR 45/55%	@50% V_{DD}								
STANDBY FUNCTION (ENABLE/DISABLE ON PIN 1)	E/D	PIN1 = HIGH OR OPEN -> OUTPUT PIN3 ACTIVE PIN1 = LOW -> OUTPUT PIN3 HIGH IMPEDANCE	<ul style="list-style-type: none"> • OUTPUT HIGH IMPEDANCE = TRI-STATE • PIN1 CAN BE LEFT OPEN = FLOATING 								
STANDBY CURRENT CONSUMPTION	I_{STB}	10 μ A	TYPICAL								

NOTE 1: CURRENT CONSUMPTION IS TYPICAL FOR 3.3V, AT LOWER SUPPLY VOLTAGES LESS CONSUMPTION APPLIES.

NOTE 2: OVERALL FREQUENCY STABILITY INCLUDES TOLERANCE @+25°C, DEVIATIONS OVER OPERATING TEMPERATURE RANGE, DEVIATIONS DUE TO OUTPUT LOAD VARIATIONS AND SUPPLY VOLTAGE FLUCTUATIONS.

MECHANICAL DIMENSIONS

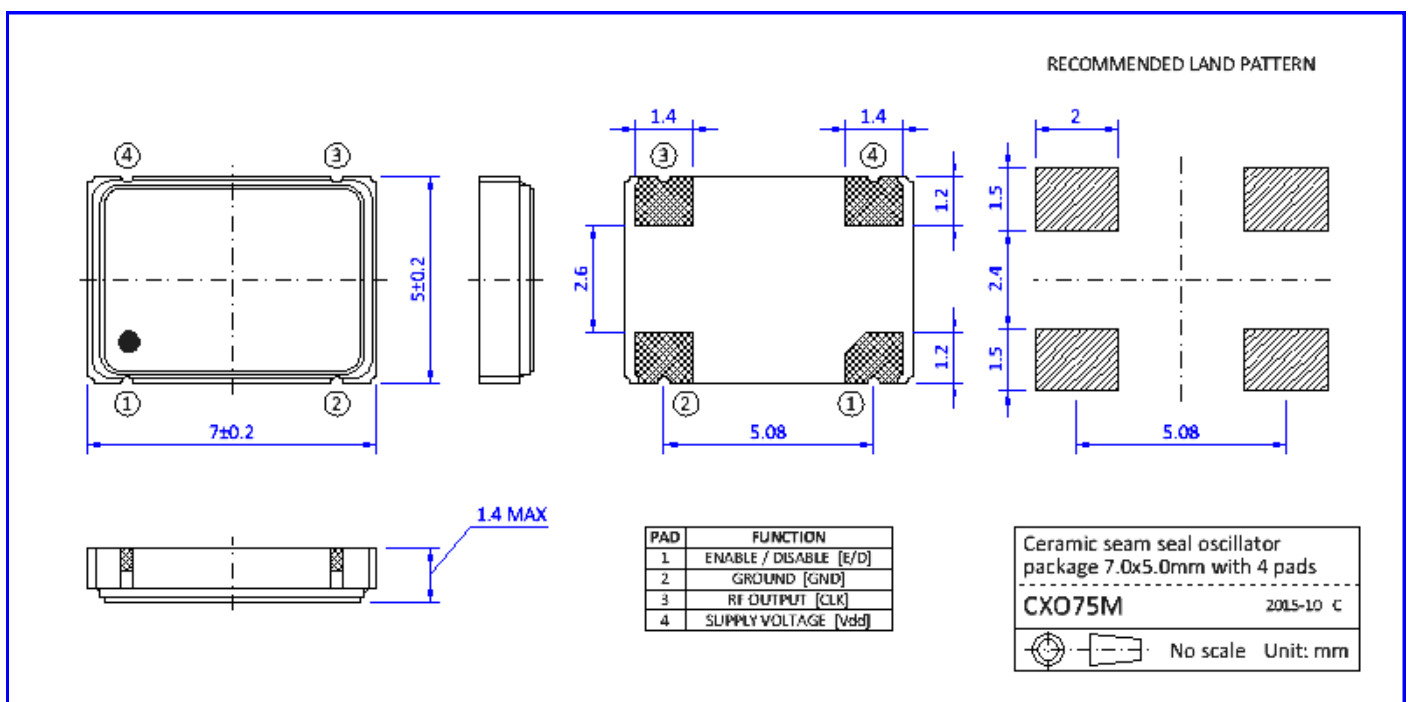


CRYSTAL OSCILLATOR UNIT WITH HCMOS OUTPUT IN CERAMIC SEAM SEAL SMD PACKAGE, SIZE 7.0 x 5.0MM.


SCO3

ENVIRONMENTAL COMPLIANCE INFORMATION

- ROHS 6/6 COMPLIANT (DIRECTIVE 2011/65/EC) AND LEAD-FREE.
- COMPLIANT TO ROHS 2 (DIRECTIVE 2018/863) (ALSO CALLED ROHS10).
- HALOGEN-FREE PER DEFINITION OF IEC 61249-2-21 2033.
- NONE-USE OF SVHCS PER REACH IS CURRENTLY GIVEN, CONTINUOUSLY MONITORED AND UPDATED AS THE COMMISSION ISSUES NEW RELEASES.
- PRODUCT DOES NOT CONTAIN ANY PHTHALATES (PHS).
- PRODUCT DOES NOT CONTAIN PVC (POLYVINYL CHLORIDE).
- PRODUCT DOES NOT CONTAIN PFOS/PFOA NOR BEING SAME USED TO MANUFACTURE THE COMPONENTS OF THIS PRODUCT.
- NONE-USE OF CONFLICT MINERALS PER THE DODD-FRANK WALL STREET REFORM AND CONSUMER PROTECTION ACT (WALL STREET REFORM ACT).

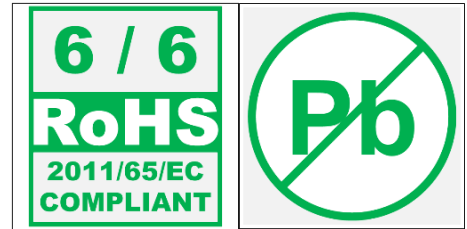


SOLDERING RECOMMENDATIONS

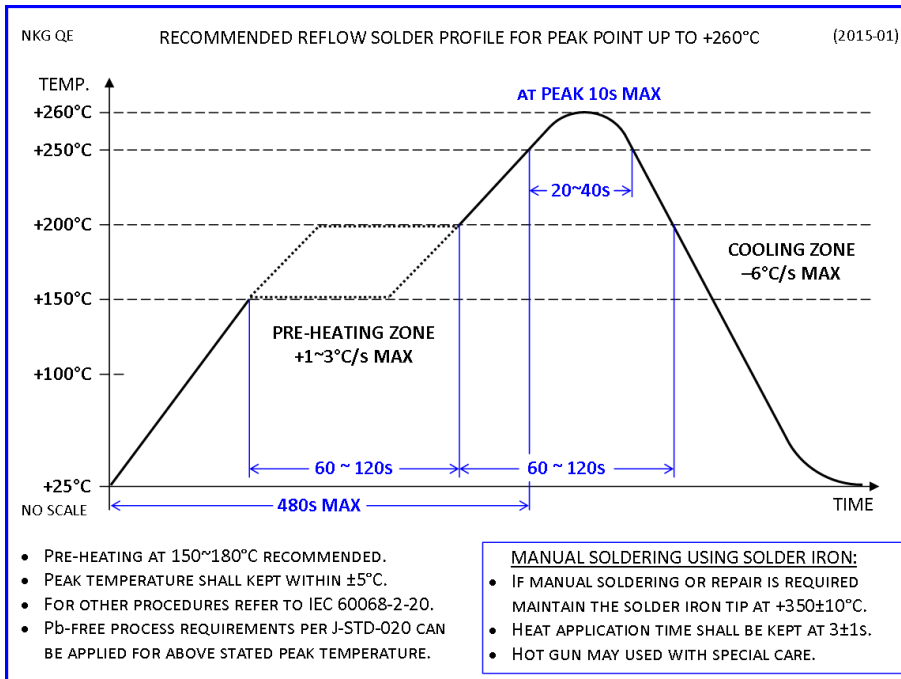

PACKAGING INFORMATION


- PACKAGING IN TAPE & REEL IN COMPLIANCE TO EIA-481.
- QTY PER REEL: 1,000PCS
- REEL DIA A=180MM.
- EMBOSSED CARRIER TAPE WIDTH W = 16MM.
- COMPONENT PITCH P1 = 8MM.

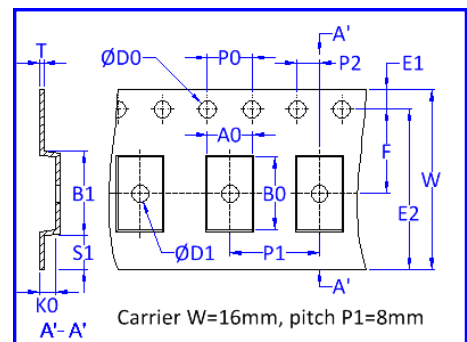

PART NUMBER SYNTAX

- PART NUMBER FAMILY (REPRESENTS PRODUCT MODEL W/ CMOS OUTPUT AND PACKAGE SIZE)
- SUPPLY VOLTAGE NOMINATOR (I.E. 3= 5.0V, 6= 3.3V, 7= 1.8V, 8= 2.8V, 9= 2.5V)
- FREQUENCY STABILITY CODE (I.E. A= $\pm 25\text{PPM}$, B= $\pm 50\text{PPM}$, C= $\pm 100\text{PPM}$, D= $\pm 30\text{PPM}$)
- NOMINAL FREQUENCY (IN MHZ WITH AT LEAST FOUR DIGITS AFTER DECIMAL POINT)
- OPERATING TEMPERATURE RANGE CODE (I.E. M= $-10 \sim 70^\circ\text{C}$, W= $-40 \sim 85^\circ\text{C}$)
- OUTPUT SYMMETRY INDICATOR (N= 40/60%, T= 45/55%)
- OUTPUT LOAD DESIGNATOR (I.E. S= STANDARD 15PF, C= 20PF, D= 25PF, E= 30PF, G= 50PF)
- PART NUMBER EXTENSION (ONLY FOR NON-STANDARD OR CUSTOMIZED PARTS)

SCO3 6 B 25.0000 MTS-EXT

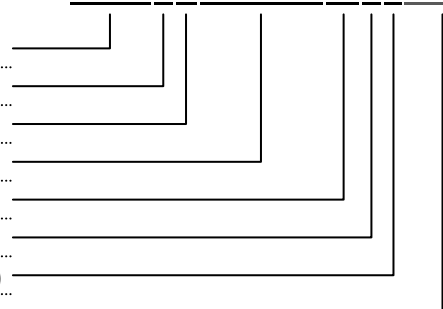

IF THERE IS A LARGE NUMBER OF CODES IN USE THE TABLE ABOVE MAY ONLY SHOW A FEW EXAMPLES.

FOR MORE INFORMATION PLEASE CONTACT US.

HONG KONG:
NAKAGAWA ELECTRONICS LIMITED
+852 2389 9201 sales@nkg.com.hk
+852 2341 0001 www.nkg.com.hk

China Shenzhen office:
深圳中川晶体电子有限公司
+86(0)755 2598 2648 sales_sz@nkg.cn
+86(0)755 2598 2390 www.nkg.com.hk

China Suzhou office:
苏州纳美电子有限公司
+86(0)512 8818 7890 sales_nm@nkg.cn
+86(0)512 8818 7889 www.nkg.com.hk