

# QC16 Series

## 1.2x1.6 4-Pad SMD Quartz Crystal Unit



### Features

- 1.2 x 1.6 x 0.4mm ultra miniature package
- Seam sealed ceramic package with metal lid assures high precision and reliability

### Applications

- High density applications
- Modem, communication and test equipment
- PCMCIA, wireless applications
- Automotive applications



### General Specifications

Frequency Range	24.000 to 60.000MHz (Fundamental)
Frequency Tolerance at 25°C	±15 to ±30ppm (±30ppm standard)
Frequency Stability over Temperature Range	See Stability vs. Temperature Table
Storage Temperature	-55 to +125°C
Aging per Year	±3ppm max.
Load Capacitance $C_L$	7 to 32pF and Series Resonance
Shunt Capacitance $C_0$	3.0pF
Equivalent Series Resistance (ESR)	See ESR Table
Drive Level	100µW max.
Insulation Resistance ( $M\Omega$ )	500 at 100Vdc ±15Vdc

### Equivalent Series Resistance (ESR)

Frequency Range - MHz	$\Omega$ max.	Mode of Operation
24.000 to 26.000	150	Fundamental
26.001 to 30.000	125	
30.001 to 38.000	100	
38.001 to 60.000	80	


### Frequency Stability vs. Temperature

Operating Temperature	±15ppm	±20ppm	±30ppm	±50ppm	±100ppm
-20 to +70°C	○	○	○	○	○
-40 to +85°C	○*	○	●	○	○
-40 to +105°C	-	-	-	○	○
-40 to +125°C	-	-	-	-	○

\*Operating Temperature -30 to +80°C

● standard ○ available

### Mechanical Dimensions

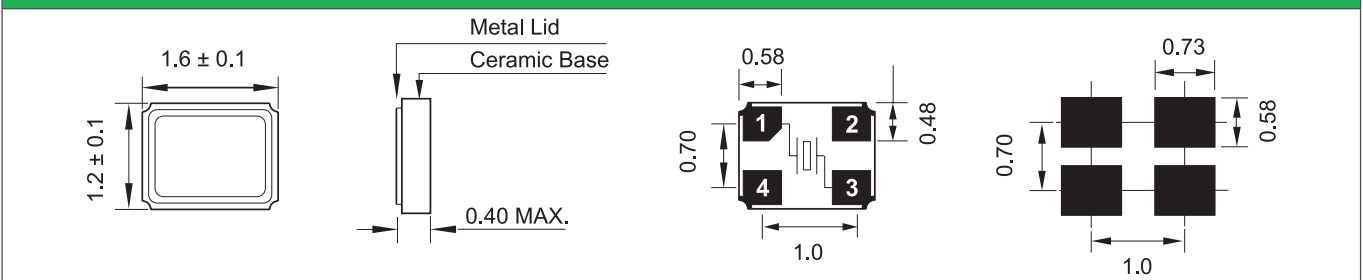

### Part Numbering Guide

Qantek Code	Package	Nominal Frequency (in MHz)	Vibration Mode	Load Capacitance	Operating Temperature Range	Frequency Tolerance	Frequency Stability	Automotive Indicator	Packaging
Q = Qantek	C16 = 1.2x1.6 4-Pad SMD	7 digits including the decimal point (f.i.e. 12.0000)	F = AT-Fund	S = Series 08 = 8pF <b>12 = 12pF</b> 18 = 18pF 20 = 20pF etc.	A = -20 to +70°C <b>B = -40 to +85°C</b> C = -40 to +105°C D = -40 to +125°C	1 = ±15ppm 2 = ±20ppm 3 = ±25ppm <b>4 = ±30ppm</b>	1 = ±15ppm 2 = ±20ppm 3 = ±25ppm 4 = ±30ppm <b>5 = ±50ppm</b>	not available	M = 250pcs Tape&Reel R = 1000pcs Tape&Reel R3 = 3000pcs Tape&Reel

Example: QC1624.0000F12B45R

bold letters = recommended standard specification



### QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)


www.qantek.com

info@qantek.com

# QC16 Series

1.2x1.6 4-Pad SMD Quartz Crystal Unit

## Tape and Reel Dimensions

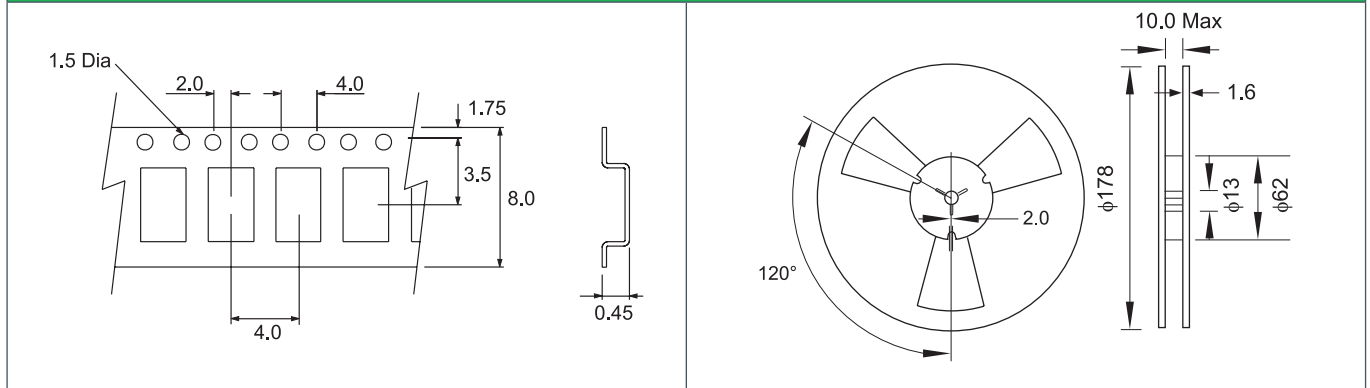

## Marking Code Guide

Contains frequency, Qantek manufacturing code, production code (month and year) and load capacitance.

### Year/Month Codes


	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2019 / 2023	A	B	C	D	E	F	G	H	J	K	L	M
2020 / 2024	N	P	Q	R	S	T	U	V	W	X	Y	Z
2021 / 2025	a	b	c	d	e	f	g	h	j	k	l	m
2022 / 2026	n	p	q	r	s	t	u	v	w	x	y	z

### Load Capacitance Code in pF

pF	PN Code	pF	PN Code
12	A	20	F
18	B	22	G
8	C	30	H
10	D	32	I
16	E	S	S

Example: First Line: 24.0 (Frequency) Second Line: QDA (Qantek - April 2019 - 12 pF)

## Solder Reflow Profile

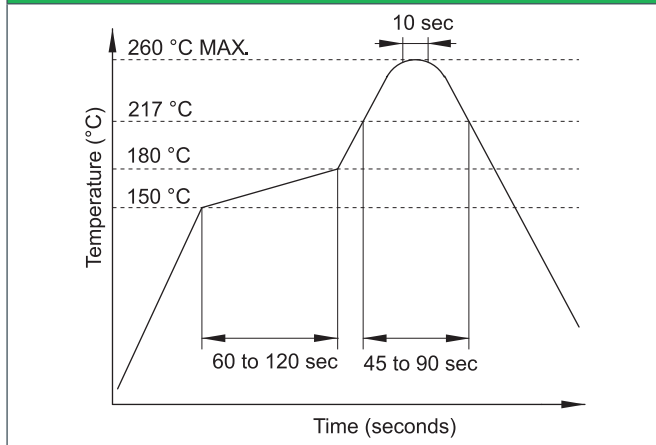

## Environmental Specifications

Mechanical Shock	MIL-STD-202, Method 213, C
Vibration	MIL-STD-202, Method 201 & 204
Thermal Cycle	MIL-STD, Method 1010, B
Gross Leak	MIL-STD-202, Method 112
Fine Leak	MIL-STD-202, Method 112

All specifications are subject to change without notice.



**QANTEK Technology Corporation**

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)

www.qantek.com

info@qantek.com