


QTM26S Series

2.0x6.0 Metal Cylindrical SMD Tuning Fork

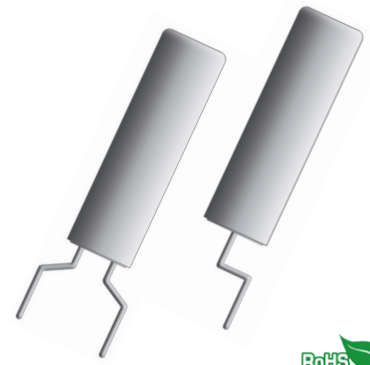


Features

- An industry-standard source of 32.768kHz clock signals
- Excellent shock resistance and environmental capability
- RoHS compliant by exemption
- A high build quality component at low cost

General Specifications

| | |
|-------------------------------------|---|
| Nominal Frequency | 32.768 kHz |
| Frequency Tolerance at 25°C | ±20ppm |
| Temperature Coefficient | -0.034 ppm/Δ °C ² |
| Temperature Range (Operating) | -40 to +85°C |
| Storage Temperature | -55 to +125°C |
| Load Capacitance C _L | 6.0pF, 12.5pF |
| Shunt Capacitance C ₀ | 1pF typ. |
| Motional Capacitance C ₁ | 2.5fF typ. |
| Equivalent Series Resistance (ESR) | 50KΩ max. |
| Drive Level | 1μW max. |
| Aging per Year | ±3ppm max. |
| Insulation Resistance (MΩ) | 500 min. |
| Quality Factor | 80000 typ. |
| Capacitance Ratio | 400 typ. |
| Resistance to Shock | ±5ppm maximum offset from 75cm drop test in all axes on to a hard surface |
| Turnover Temperature | 25°C ±5°C |


Mechanical Dimensions

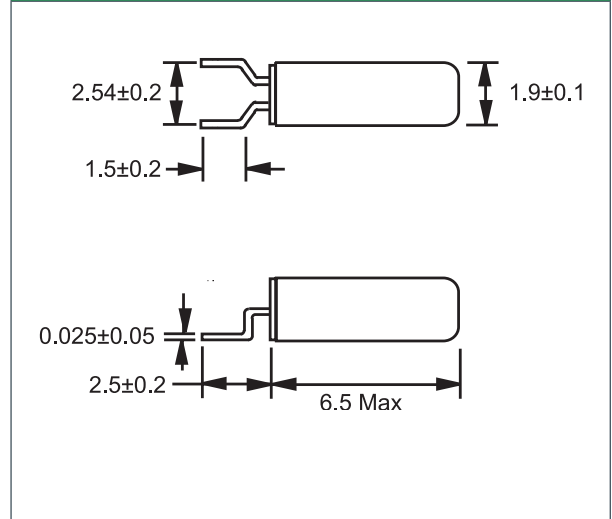

Part Numbering Guide

| Qantek Code | Package | Nominal Frequency (in kHz) | Load Capacitance | Operating Temperature Range | Frequency Tolerance | Packaging |
|----------------------------|---------------------------|----------------------------|-------------------------|-----------------------------|---------------------|---|
| Q = Qantek | TM26S = 2.0x6.0 Metal SMD | 32.768 | 06 = 6pF 12 = 12.5pF | B = -40 to +85°C | 2 = ±20ppm | R = 3000pcs Tape&Reel |
| Example: QTM26S32.76812B2R | | | | | | bold letters = recommended standard specification |

Tape and Reel Dimensions

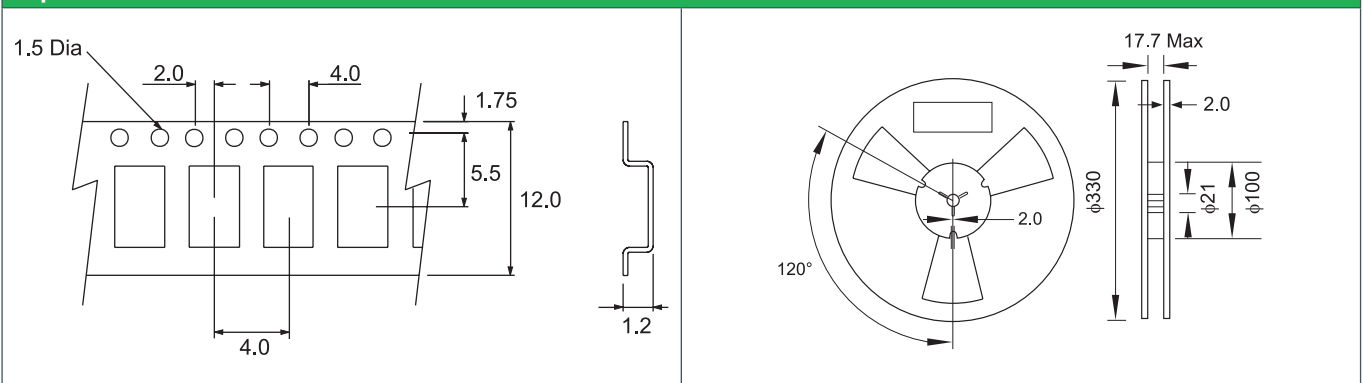

QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)

www.qantek.com

info@qantek.com


QTM26 Series

2.0x6.0 Cylindrical Package Tuning Fork


Marking Code Guide

Contains manufacturer code / lot code

Solder Reflow Profile

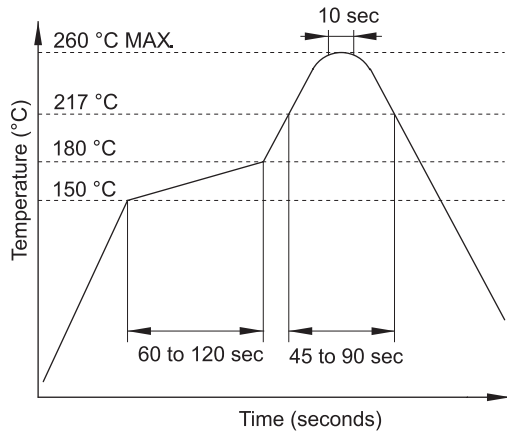

Frequency vs. Temperature Characteristics

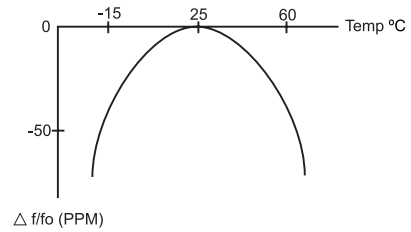

To calculate the frequency stability the parabolic curvature constant (K) is needed.

Example: Calculating the stability at 45°C

1- Change in temperature (ΔT) is $(45-25) = +20^\circ\text{C}$

2- Change in frequency is $(-0.035 \times (\Delta^\circ\text{C})^2) = (-0.035 \times (20)^2) = -13.6\text{ppm}$



QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)

www.qantek.com

info@qantek.com