

- **FEATURES**
 - ULTRA SMALL PACKAGE
 - EXCELLENT FOR HIGH DENSITY PACKAGING
 - STANDBY CURRENT

SERIES CO425


● SPECIFICATIONS

SERIES		CO425
FREQUENCY RANGE		1.544 MHz TO 125.00 MHz
FREQUENCY STABILITY		±100 PPM ±50 PPM ±25 PPM* ±20 PPM*
TEMPERATURE RANGE	OPERATING	-10°C TO +70°C
	EXTENDED	-40°C TO +85°C
	STORAGE	-55°C TO +125°C
INPUT	VOLTAGE	2.5 VDC ±5%
	CURRENT	1.544 MHz TO 25.000 MHz: 3 mA MAX 25.001 MHz TO 40.000 MHz: 4 mA MAX 40.001 MHz TO 70.000 MHz: 10 mA MAX
OUTPUT	LOAD	15 pF CMOS MAX
	SYMMETRY	NORMAL: 40% TO 60% TIGHT: 45% TO 55%
	LEVEL	LOGIC "0": 0.18 VDC MAX LOGIC "1": 1.62 VDC MAX
	RISE/FALL TIME (20% TO 80%)	1.544 MHz TO 35.000 MHz: 6 ns MAX (20%~80%, CMOS load) 35.001 MHz TO 70.000 MHz: 3 ns MAX (0.4V~2.4V, TTL load)
STANDBY CURRENT		1.544 MHz TO 35.000 MHz: 100µA MAX 35.001 MHz TO 70.000 MHz: 10µA MAX
ENABLE/DISABLE FUNCTION		PIN 1: HIGH(+1.62 VDC MIN) PIN3: ENABLED PIN1: LOW(+0.18 VDC MAX) PIN3: DISABLED(HIGH IMPEDANCE)
START-UP TIME		10 ms MAX



† INCLUSIVE OF 25°C TOLERANCE, OPERATING TEMPERATURE RANGE, VOLTAGE OR LOAD CHANGES, AGING, SHOCK AND VIBRATION
* CONSULT RALTRON FOR SPECIFICATIONS

● OUTLINE DRAWING

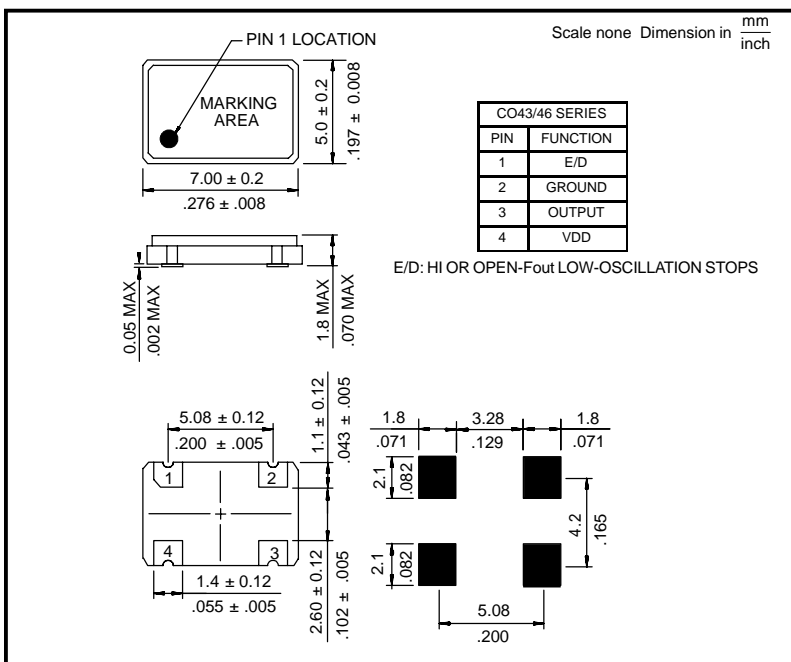

● PACKAGING


254 mm REEL DIAMETER, 16mm TAPE WIDTH, 8mm PITCH
QUANTITY: 1000 PIECES PER REEL

● PART NUMBERING SYSTEM

SERIES	FREQUENCY STABILITY		FREQUENCY	OPTION		TAPE AND REEL
	10	±100 PPM		T	TIGHT SYMMETRY (45% TO 55%)	
CO425	05	±50 PPM	IN MHZ	T	TIGHT SYMMETRY (45% TO 55%)	TR
	025	±25 PPM				
	020	±20 PPM				

EXAMPLE: CO42510-32.000-TR, CO425025-52.000-T-TR

● REFLOW SOLDERING PROFILE

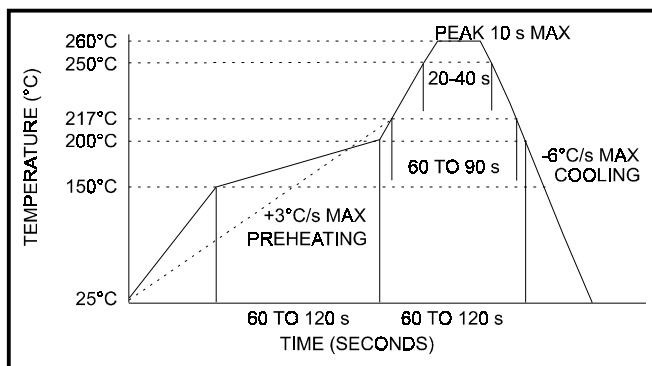

● CARRIER TAPE DIMENSIONS

