


● **FEATURES**

- ULTRA SMALL PACKAGE OF 2.0 x 1.2 x 0.6 mm
- 32.768 KHz
- PRECISION SEALED UNIT



● **SPECIFICATIONS**

PARAMETER	VALUE
FREQUENCY RANGE	32.768 KHz
MODE OF OSCILLATION	FUNDAMENTAL
FREQUENCY TOLERANCE AT 25°C	±50 PPM MAXIMUM (±10, AND ±20 PPM AVAILABLE)
FREQUENCY STABILITY OVER TEMPERATURE	-0.03 ±0.01 PPM / °C <sup>2</sup>
OPERATING TEMPERATURE RANGE	-40°C TO +85°C
STORAGE TEMPERATURE RANGE	-55°C TO +125°C
AGING	±3 PPM PER YEAR MAXIMUM
LOAD CAPACITANCE	9.0 pF or 12.5 pF
EQUIVALENT SERIES RESISTANCE	90 KΩ MAX
SHUNT CAPACITANCE	1.5 pF MAXIMUM
DRIVE LEVEL	0.5 μW TYP
SHOCK RESISTANCE	±5 PPM MAXIMUM 75 cm DROP TEST IN 3 AXES ONTO A HARD SURFACE
REFLOW CONDITIONS	260°C ±5°C FOR 10s MAXIMUM




■ **PART NUMBERING SYSTEM**

TYPE	-	FREQUENCY KHz	-	LOAD CAPACITANCE pF	-	TOLERANCE PPM	-	EXTENDED TEMPERATURE	-	TAPE & REEL
RT2012	-	32.768	-	9 or 12.5	-	BLANK for 50 ppm 10, 20 or 30	-	EXT	-	TR


**EXAMPLE: RT2012-32.768-12.5-20-EXT-TR**

Surface Mount Tuning Fork Crystal, 2.0 mm x 1.2 mm package, 32.768 KHz, 12.5 pF load, ±20 ppm Tolerance, Operating Temperature from -40°C to +85°C, Tape and Reel packaging

● **MECHANICAL SPECIFICATION**

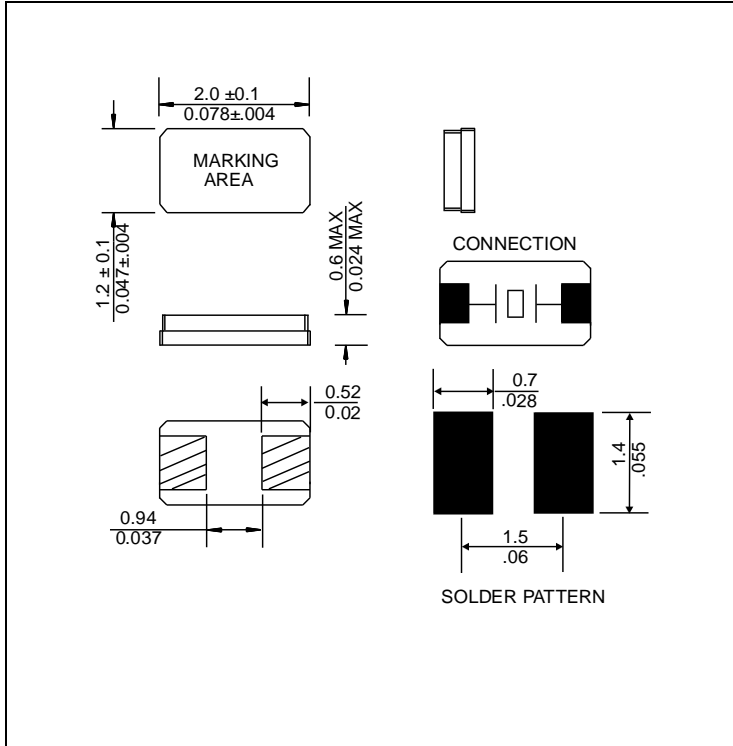

● **CARRIER TAPE DIMENSIONS**

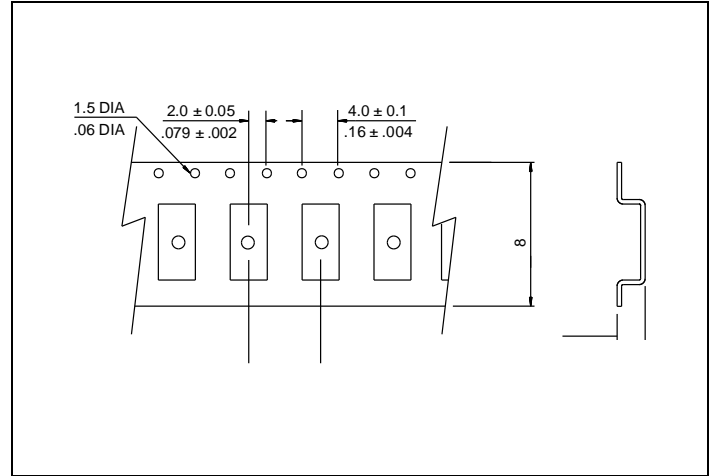


NOTE: REFER TO EIA-481 FOR DIMENSIONS

● **PACKAGING**

- 180 mm REEL DIAMETER
- 8 mm TAPE WIDTH
- QUANTITY: 3000 PIECES PER REEL
- IN ACCORDANCE WITH EIA-481

● REFLOW PROFILE

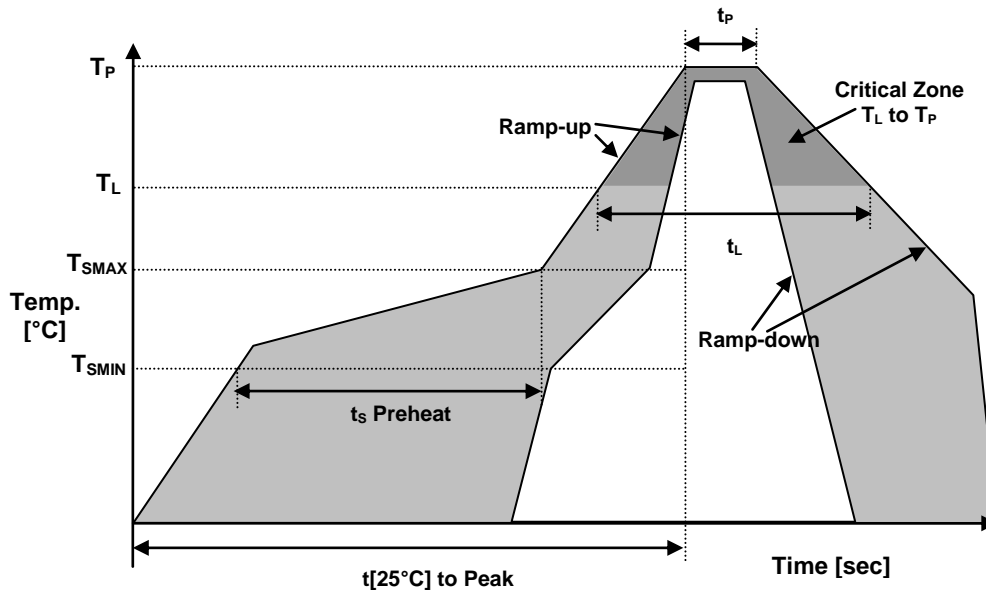

Reflow profile (Reference IPC/JEDEC J-STD-020)		
Temperature Min Preheat	$T_{SMIN}$	150°C
Temperature Max Preheat	$T_{SMAX}$	200°C
Time ( $T_{SMIN}$ to $T_{SMAX}$ )	$t_s$	60-180 sec.
Temperature	$T_L$	217°C
Peak Temperature	$T_P$	260°C
Ramp-up rate	$R_{UP}$	3°C/sec max.
Ramp-down rate	$R_{DOWN}$	6°C/sec max.
Time within 5°C of Peak Temperature	$t_p$	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	$t_L$	60-150 sec.

● ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	6/6 COMPLIANT & LEAD FREE
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au
UNIT WEIGHT (GRAMS)	0.051

