



### CSX3 Model

#### 3.2x5.0 mm Ultra Miniature SMD Crystal

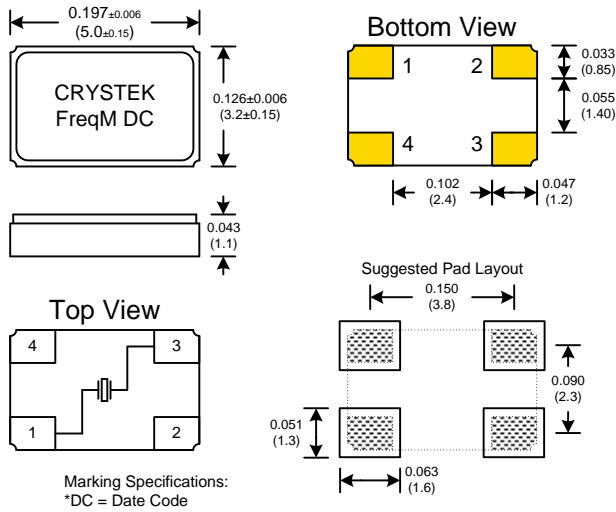

#### RECOMMENDED REFLOW SOLDERING PROFILE

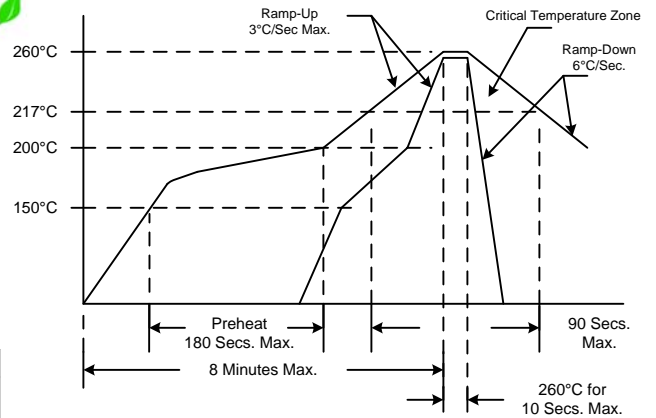

NOTE: Reflow Profile with 240°C peak also acceptable.

PIN	Signal
1	Crystal
2	GND
3	Crystal
4	GND

#### Packaging Specifications:

1K ea. Tape and Real

Dimensions inches (mm)  
All dimensions are maximum unless otherwise specified

- Frequency Range: 8.000 MHz to 50.000 MHz (Fund)  
40.000 MHz to 80.000 MHz (3<sup>rd</sup>OT)
- Calibration Tolerance: ±10ppm to ±50ppm
- Frequency Stability: ±15ppm to ±100ppm
- Operating Temp. Ranges: -10°C to 70°C  
-40°C to 85°C
- Storage Temp. Range: -40°C to 85°C
- Resistance: See Table 1
- Shunt Cap: 5pF Max
- Holder Type: 3.2x5.0mm SMD

- Aging: ±3ppm/1<sup>st</sup> year Max
- Drive level: 20uW Typical, 300uW Max
- Motional Capacitance: Not Specified
- Spurious Response: Not Specified
- C0/C1 Ratio: Not Specified
- Pullability: Not Specified
- Trim Sensitivity: Not Specified
- Temp. Coefficient: Not Specified

### Custom Designs Available

#### Build Your Own P/N

#### CSX3 - X X X - X X - Freq

Frequency Tolerance at 25°C
A ±10 ppm
B ±25 ppm
C ±50 ppm

Frequency Stability over Temp Range
A ±15 ppm (-10 to 70°C)
B ±25 ppm (-10 to 70°C)
C ±50 ppm (-10 to 70°C)
D ±100 ppm (-10 to 70°C)
E ±50 ppm (-40 to 85°C)
F ±100 ppm (-40 to 85°C)
G ±30 ppm (-40 to 85°C)

Mode
"1" or "Blank" Fundamental 8 - 50 MHz
"3" 3 <sup>rd</sup> Overtone 40 - 80 MHz

Load Capacitance
S Series
10 10 pF
12 12 pF
13 13 pF
14 14 pF
16 16 pF
18 18 pF
20 20 pF
22 22 pF
25 25 pF
32 32 pF

Resistance at series resonance	
Freq. (MHz)	Max ESR (ohms)
8.0 - 10.0 (F)	200
>10.0 - 14.0 (F)	150
>14.0 - 26.0 (F)	120
>26.0 - 50.0 (F)	60
40.0 - 80.0 (3 <sup>rd</sup> )	80

Table 1

#### Example:

CSX3-AB1-18-19.680 = ±10ppm at 25°C, ±25ppm -10 to 70°C, Fundamental, 18pF Load Cap, 19.680MHz

Specifications subject to change without notice.

TD-021011 Rev. N