

FEATURES




- Small Sizes
- High Performance / Cost Ratio
- Wide Frequency Range



| Parameters | | Specifications | | |
|---|------------------|---|-----------|---------|
| Product Series 產品系列 | | THLF-155 | THLF-26 | THLF-38 |
| Nominal Frequency 標稱頻率 | f_0 | Standard : 32.768KHz Optional : 30KHz ~ 200KHz | | |
| Frequency Tolerance, Ta=25°C ± 3°C 常溫頻率偏差 | $\Delta f/f$ | ±20ppm | | |
| Load Capacitance 負載電容 | C_L | 12.5pF or customer specify | | |
| Temperature Coefficient 溫度系數 | $\Delta f/f$ | -0.034±0.006ppm/°C ² | | |
| Operating Temperature Range 工作溫度範圍 | T _{OPR} | -20°C ~ +70°C | | |
| Storage Temperature Range 儲存溫度範圍 | T _{STG} | -55°C ~ +125°C | | |
| Drive Level 激勵功率 | DL | 1μW Max. | | |
| Series Resistance (ESR) 串聯諧振阻抗 | R ₁ | 65KΩ Max. | 50KΩ Max. | |
| Insulation Resistance 絕緣阻抗 | IR | 500MΩ Min. | | |
| Aging 老化率 | Δf_A | ±5ppm/Year Max. | | |

Please consult our sales representatives for other specifications.
如對其他規格查詢，請與我司銷售人員聯繫

DIMENSION (mm)

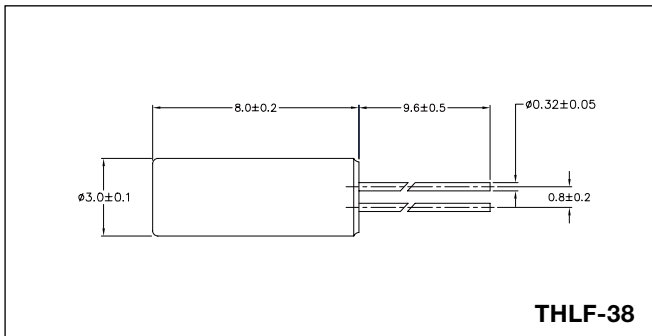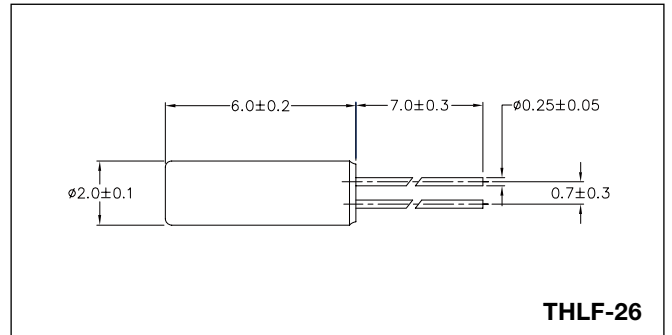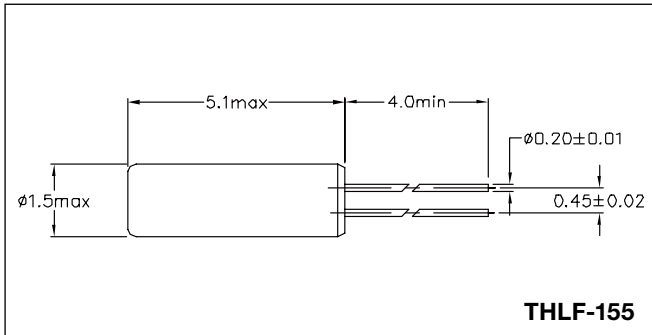

All specifications are subject to change without prior notice.
本公司保留修改規格的權利。

